


GIZA-LL-UST and GIZA-LL mounting instructions

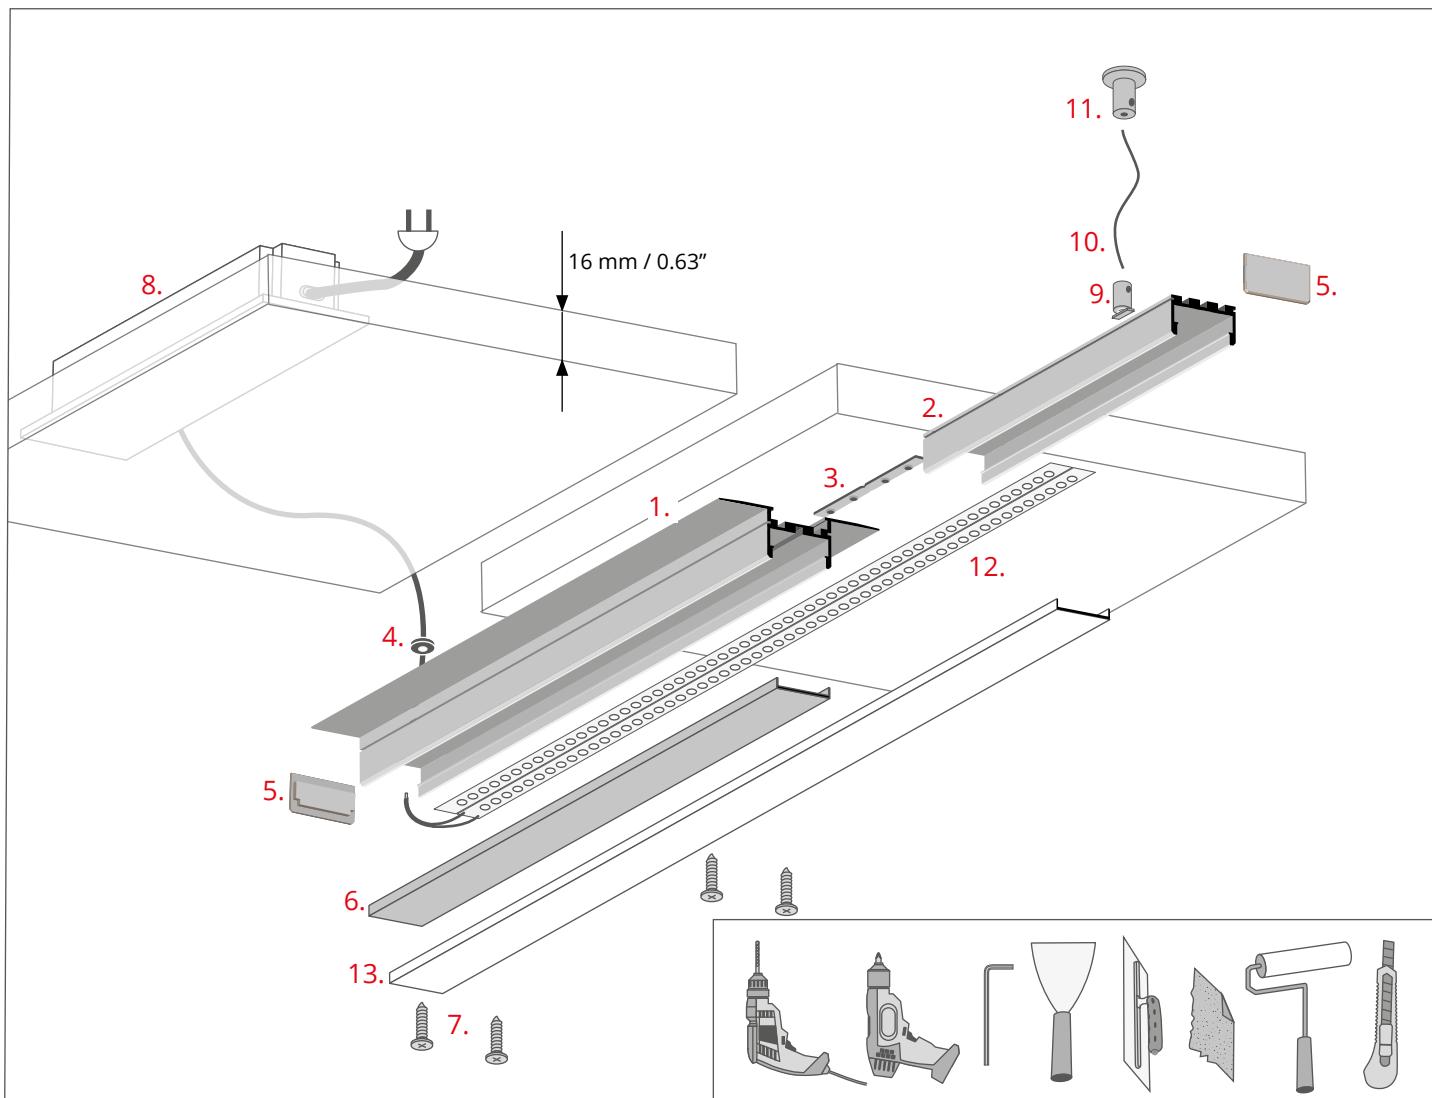

- 1. GIZA-LL-UST profile (Ref. C2724)
- 2. GIZA-LL profile (Ref. C0758)
- 3. Connector*
- 4. Gland*
- 5. End cap*
- 6. Protective insert*
- 7. Drywall screw
- 8. Power supply (12 V / 24 V)*
- 9. Fastener*
- 10. Steel wire*

- 11. Ceiling fastener*
- 12. LED tape*
- 13. Cover*


NOTE! All LED tapes must be connected to a 12 V or 24 V power supply.

IMPORTANT: Not all possible mounting procedures are presented here. More mounting procedures and related accessories can be found. Drawings of extrusions and accessories in these instructions are simplified and only approximate the actual shapes.

GIZA-LL-UST and GIZA-LL mounting instructions


a) Mounting the GIZA-LL-UST profile between drywall

Ia

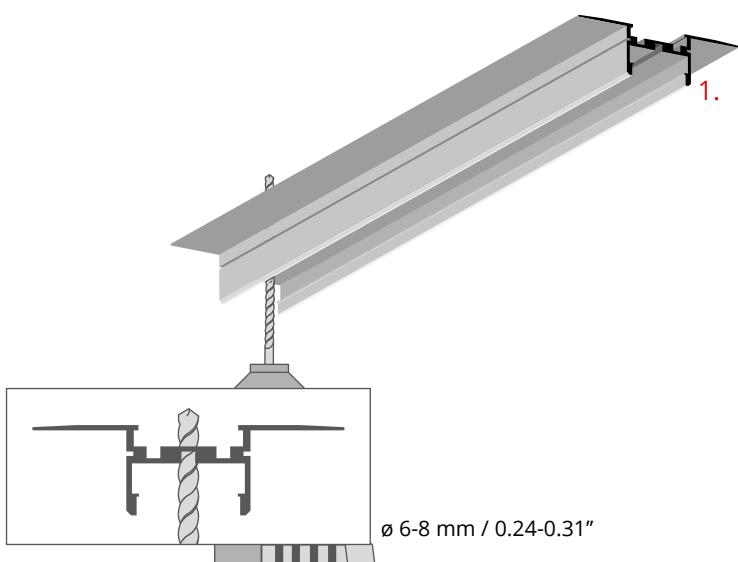


Drill a hole for the power cable in the GIZA-LL-UST (1) profile.

IIa

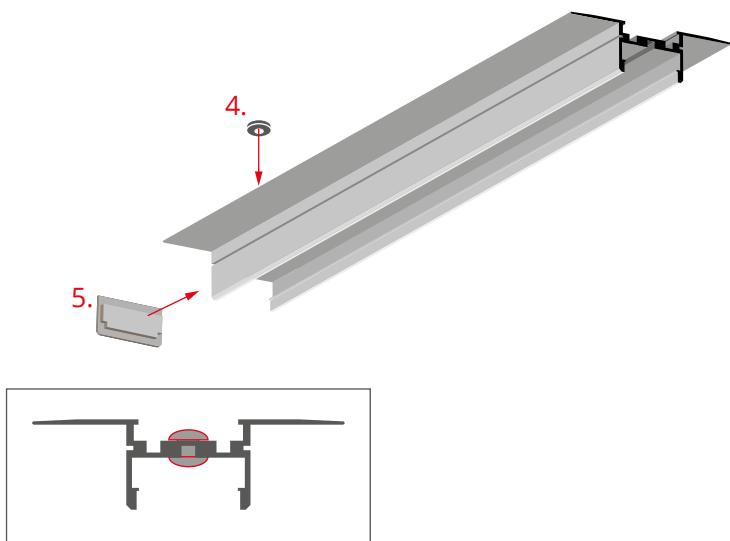

Attach the end cap (5) to the profile and install the gland (4) in the pre-drilled hole.

IIIa

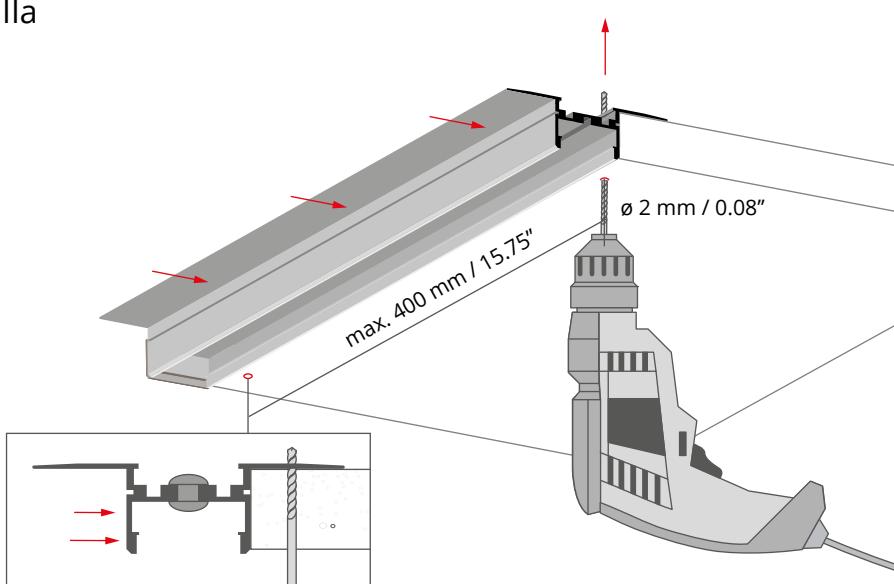


Place the profile on the edge of the drywall board and drill holes through the board and the profile's flange.

The maximum distance between the holes is $400 \text{ mm} / 15.75''$.

GIZA-LL-UST and GIZA-LL mounting instructions


a) Mounting the GIZA-LL-UST profile between drywall

IVa

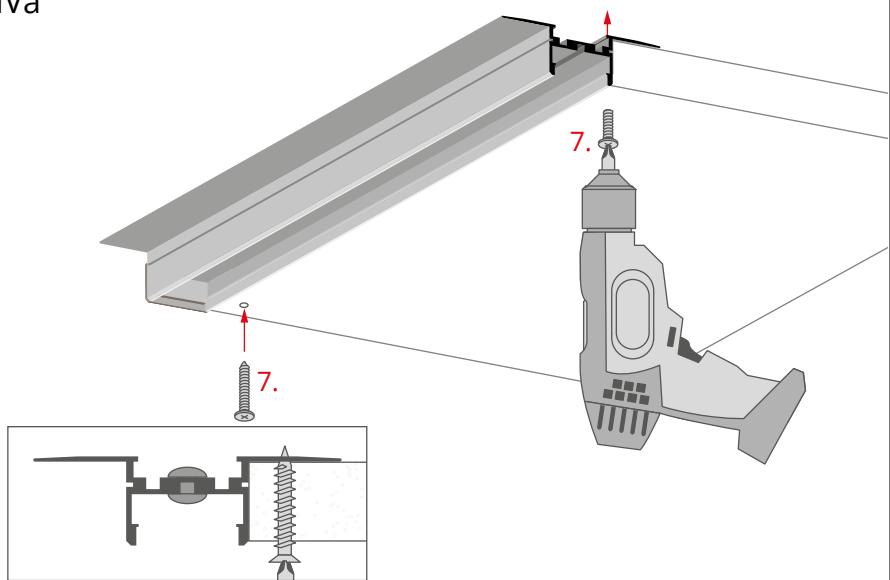

Insert the drywall screws (7) in the pre-drilled holes and screw the profile flange to the board.

Va

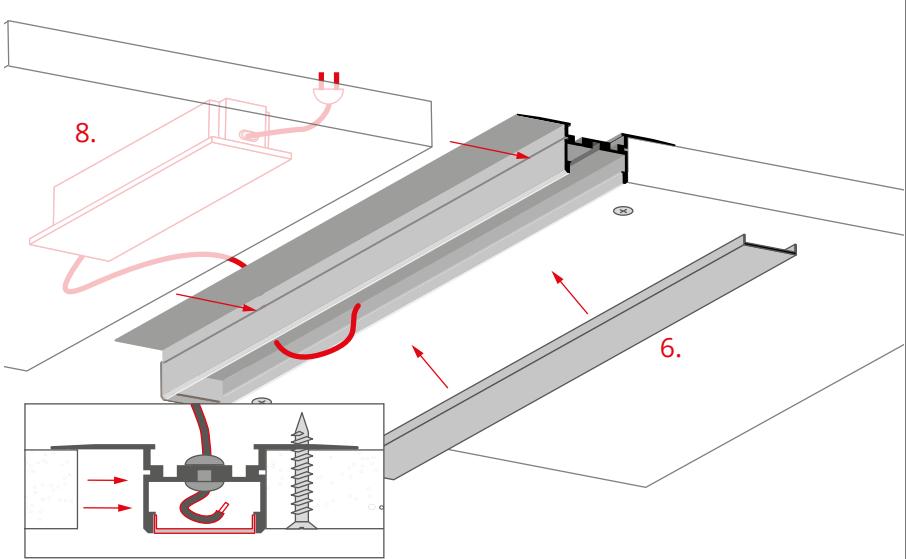


Route the cable from the power supply (8) through the gland.

Install the protective insert (6) in the profile.

Mount the second board.


Vla

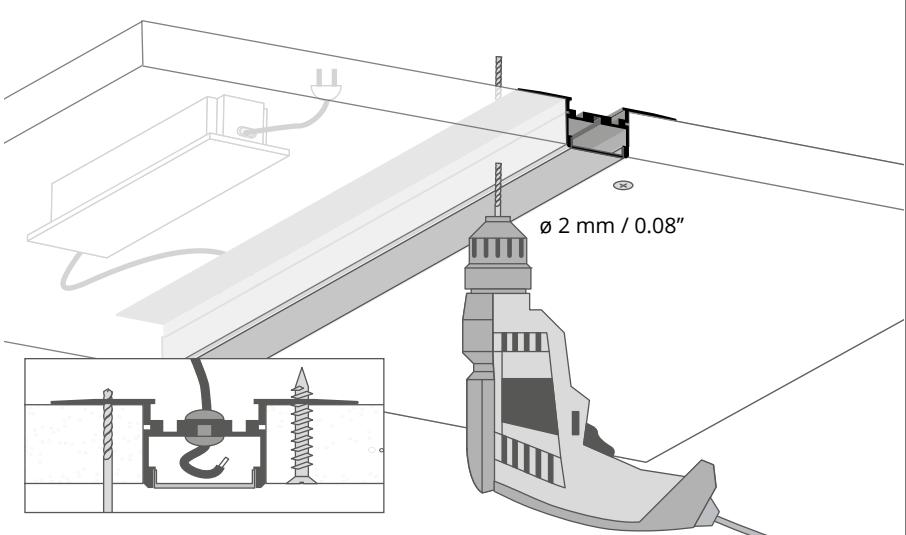


Drill holes in the second board and the profile's flange.

GIZA-LL-UST and GIZA-LL mounting instructions


a) Mounting the GIZA-LL-UST profile between drywall

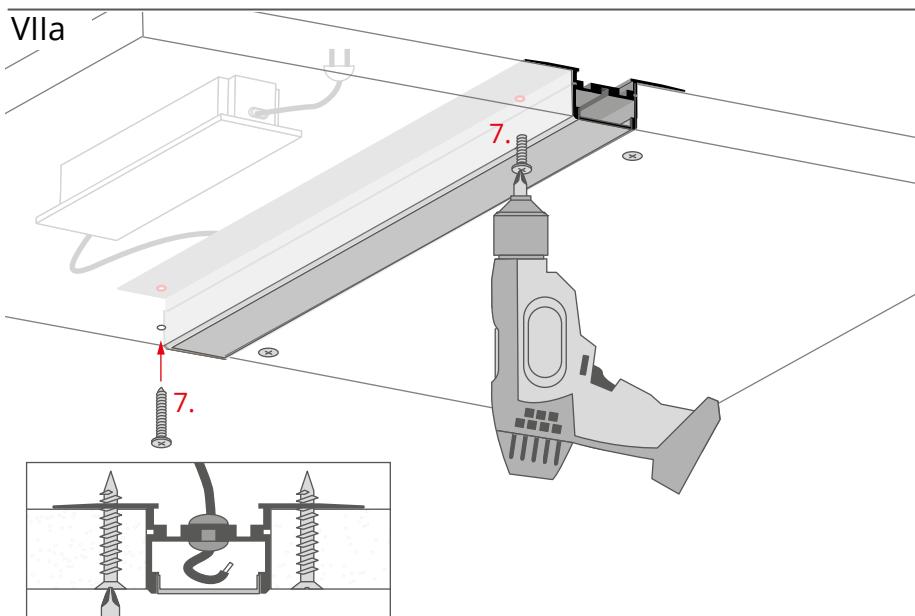

Insert the drywall screws (7) in the newly drilled holes and screw the second flange of the profile to the board.



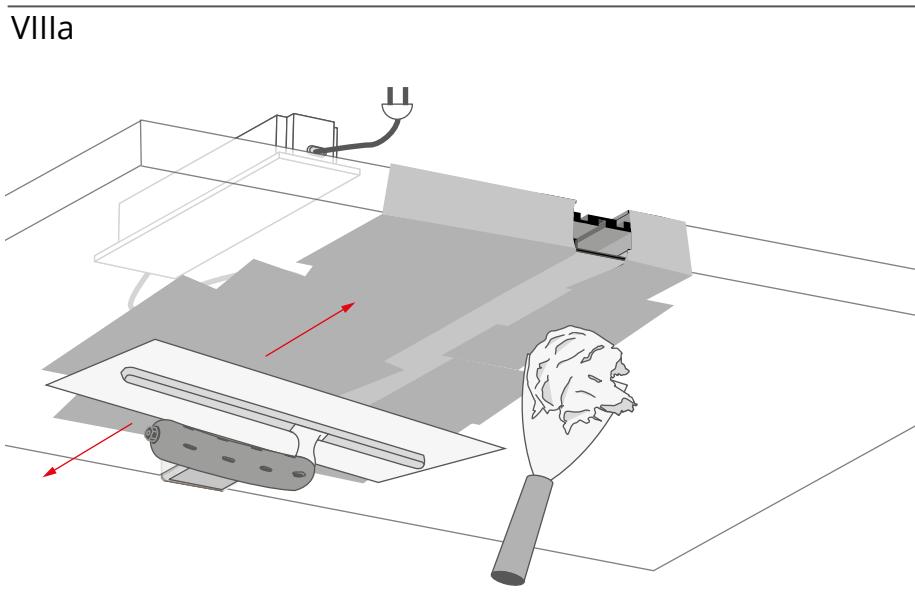


Apply plaster.
Make the surface even.

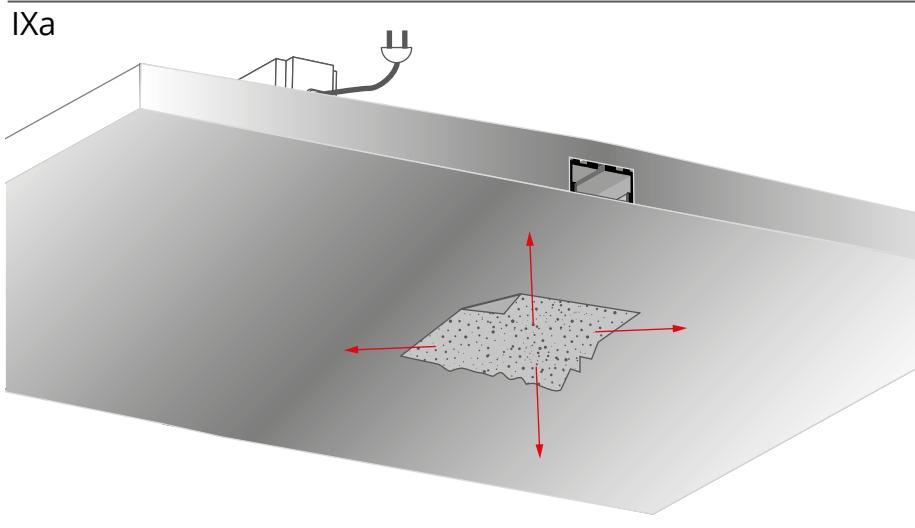

GIZA-LL-UST and GIZA-LL mounting instructions


a) Mounting the GIZA-LL-UST profile between drywall

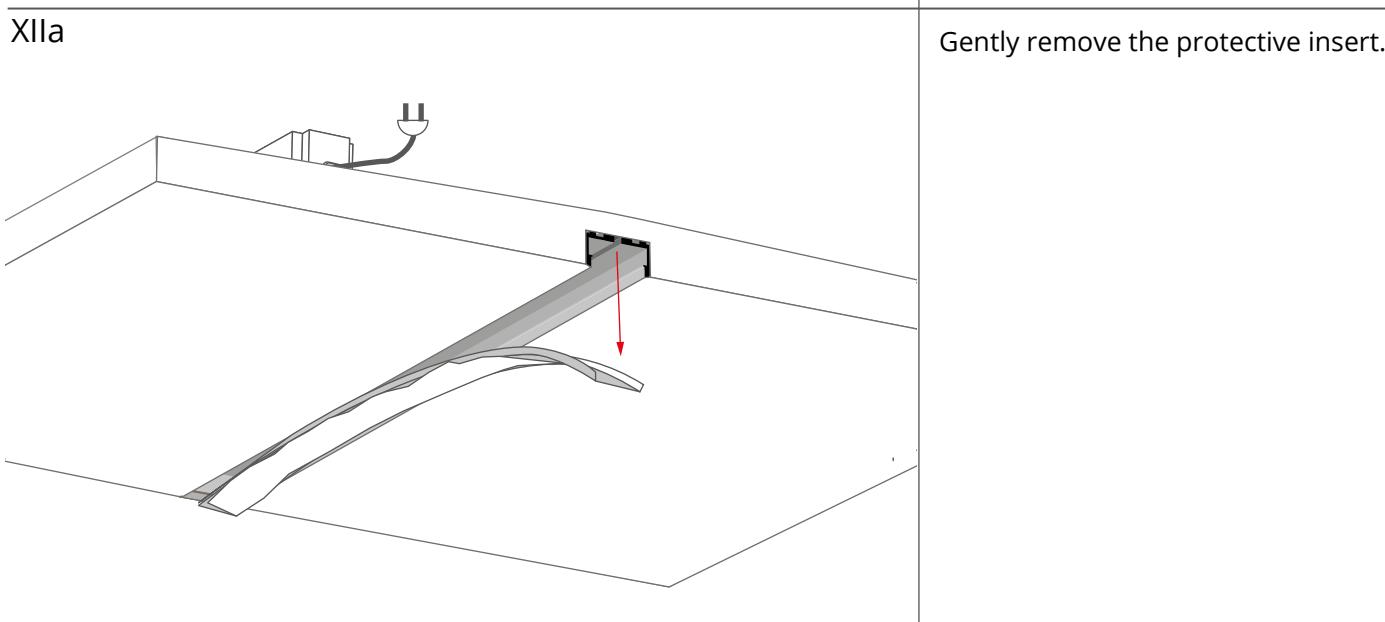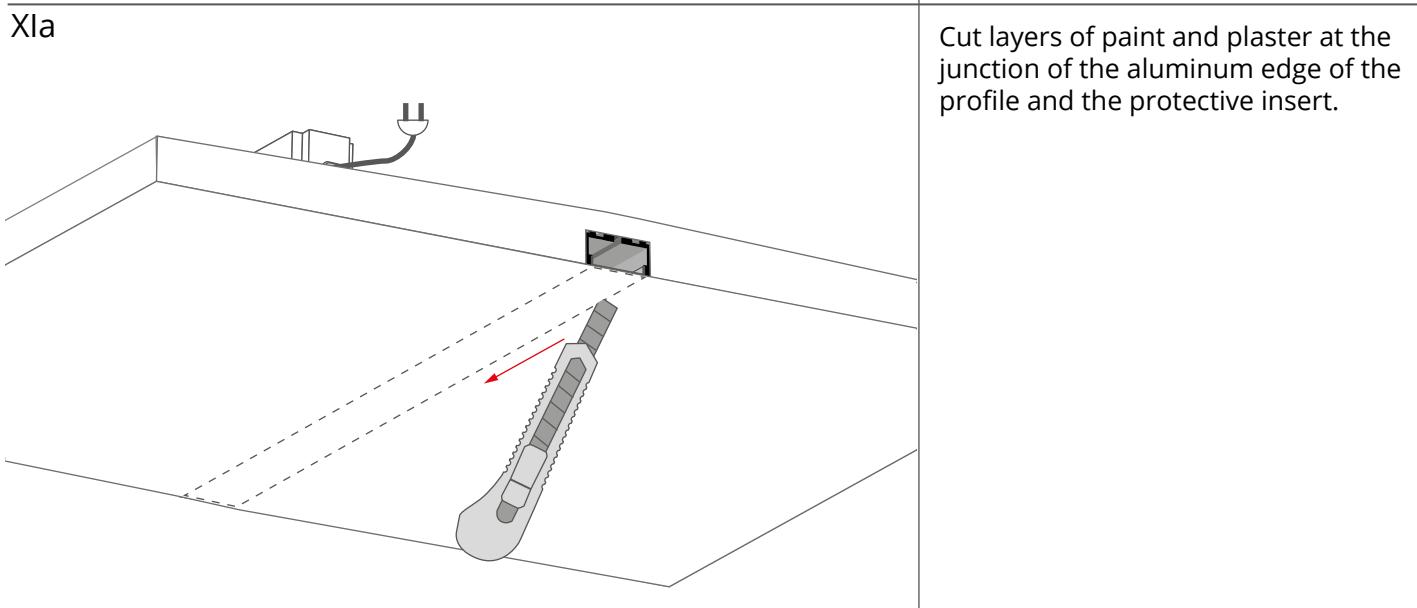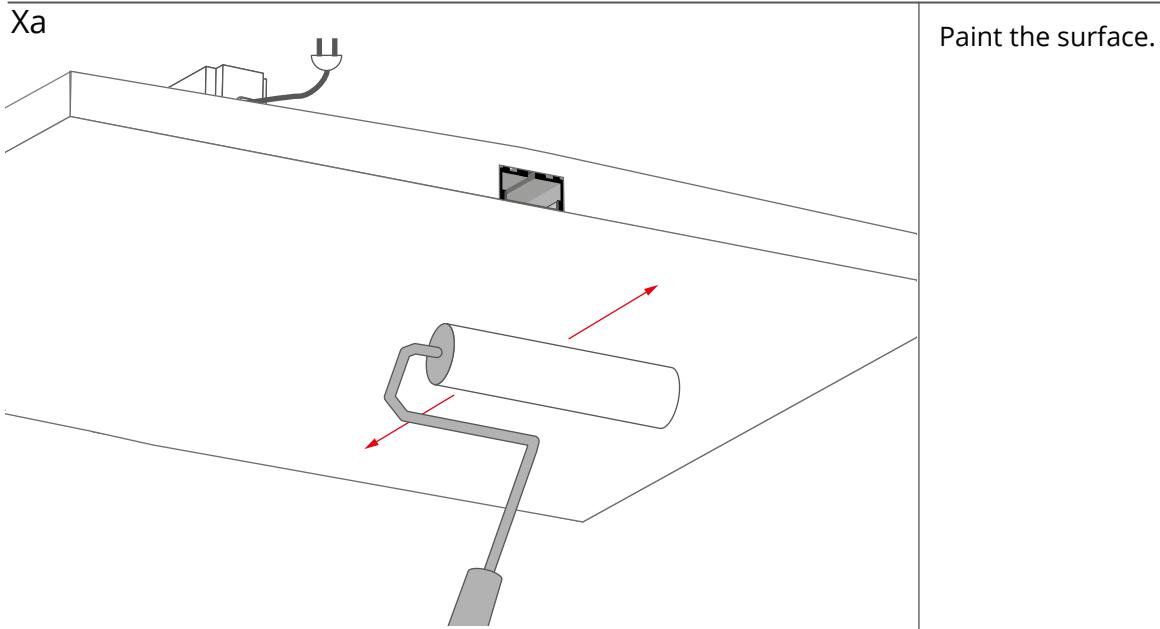

GIZA-LL-UST and GIZA-LL mounting instructions

a) Mounting the GIZA-LL-UST profile between drywall


XIIIa

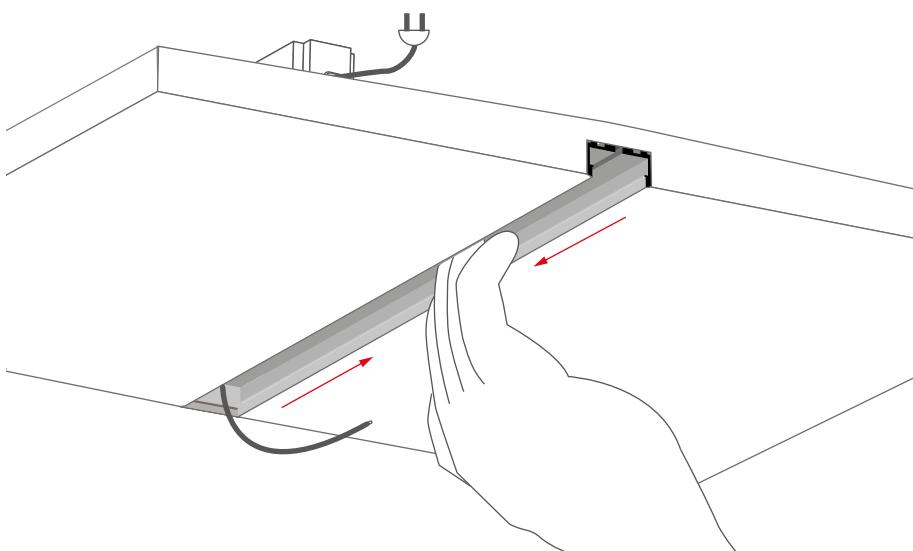

Smooth the edges of the profile.

Allow the power cable to extend from inside the profile.


XIVa

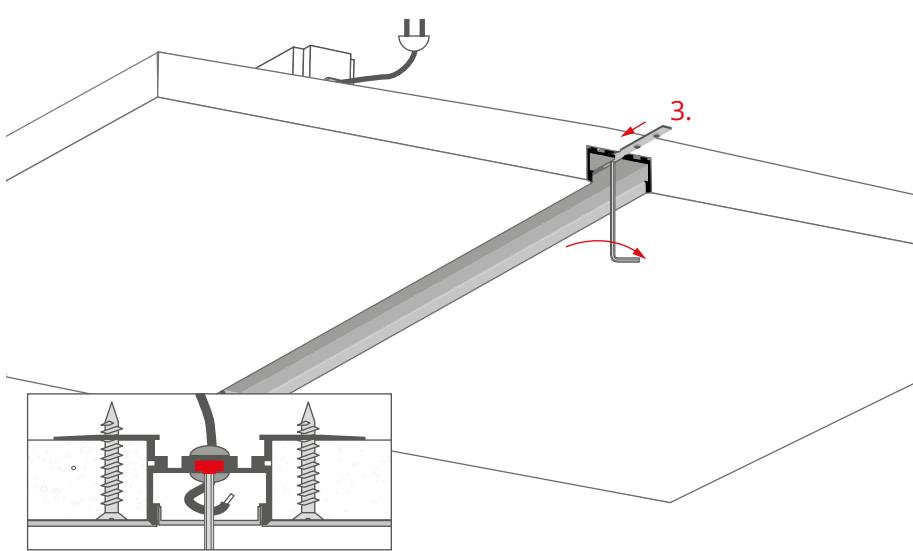

Insert the connector (3) into the channel inside the profile and tighten the locking bolts with an Allen key.


GIZA-LL-UST and GIZA-LL mounting instructions
b) Mounting the GIZA-LL profile as an extension of the lighting fixture

Ib

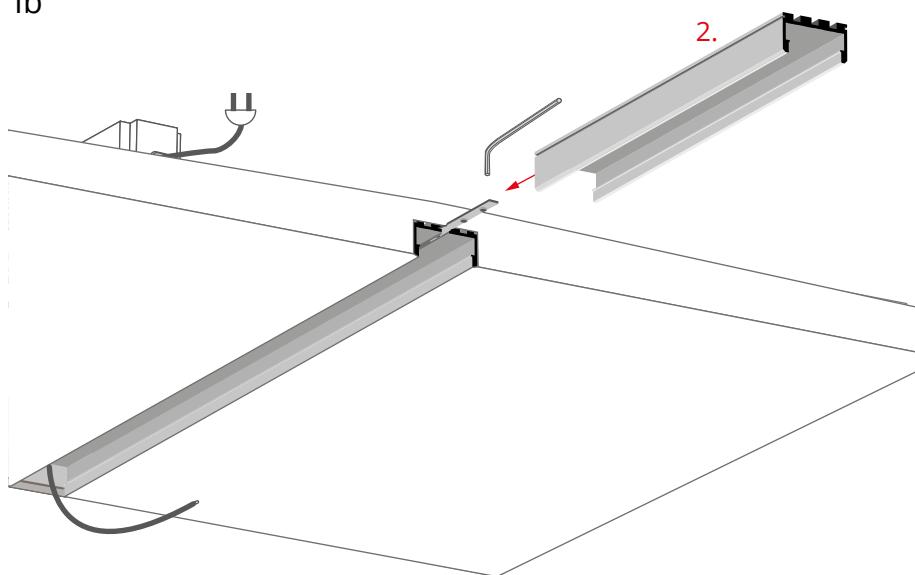


Slide the internal channel of the GIZA-LL profile (2) onto the protruding part of the connector. Finally tighten the connector screws with the Allen key.

IIb

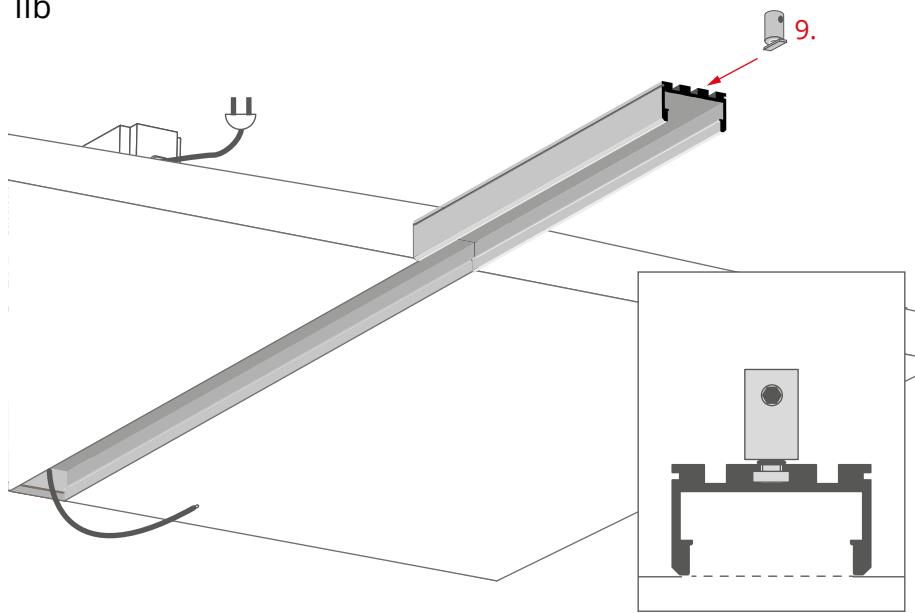

Insert the fastener (9) into the top channel of the profile.

IIIb

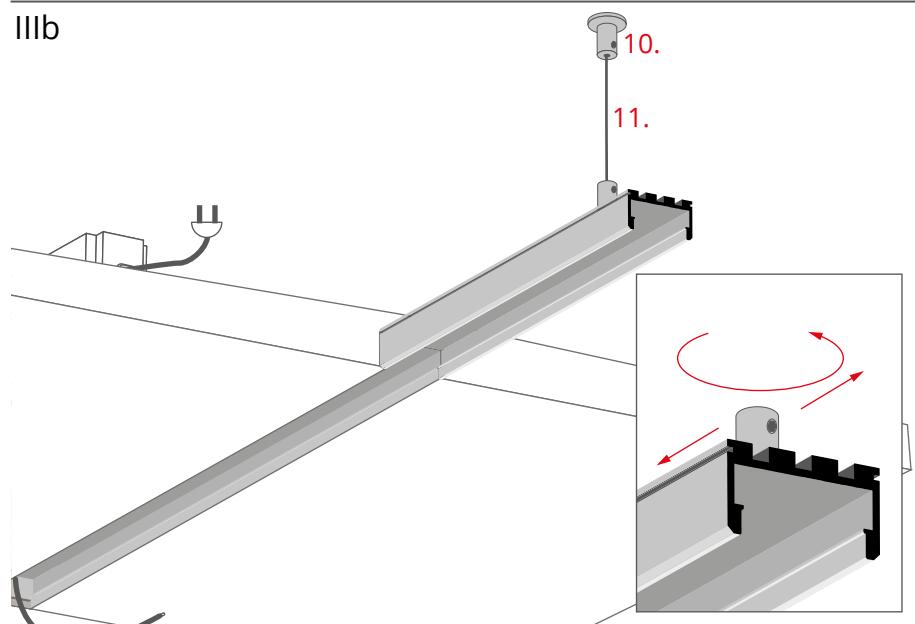


Connect the ceiling fastener (10) and the profile fastener with the wire (11).

(For more information on suspension systems, please visit our website).

GIZA-LL-UST and GIZA-LL mounting instructions
b) Mounting the GIZA-LL profile as an extension of the lighting fixture


IVb

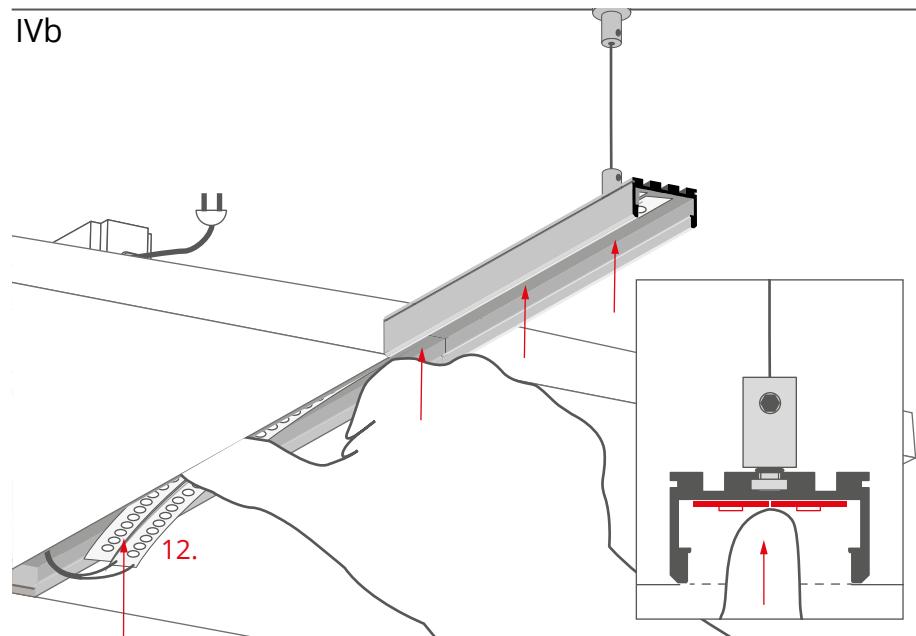


Connect the LED tapes to the power supply.

Insert the LED tape (12) in the profile.

Vb

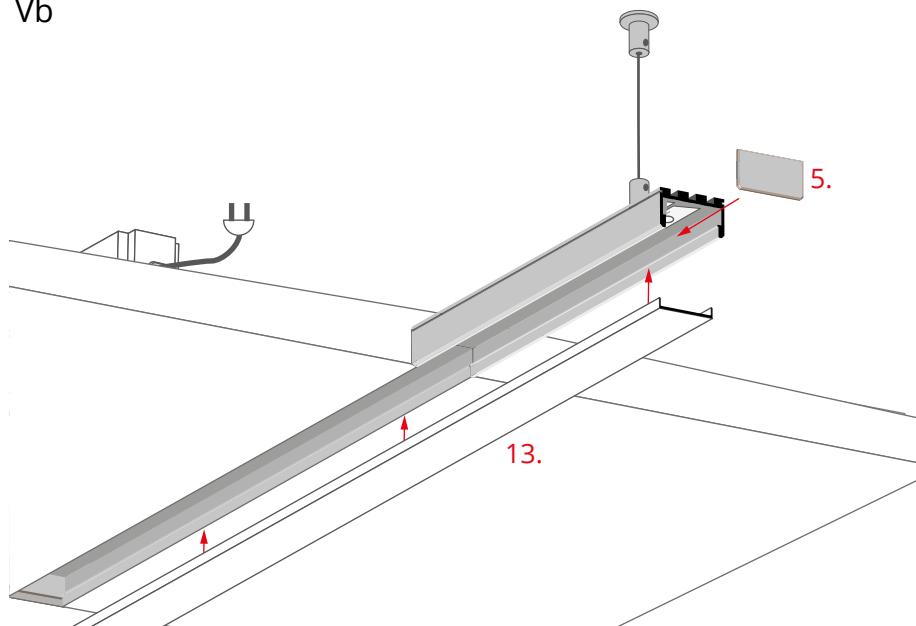

Attach the end cap (5) and the cover (13).

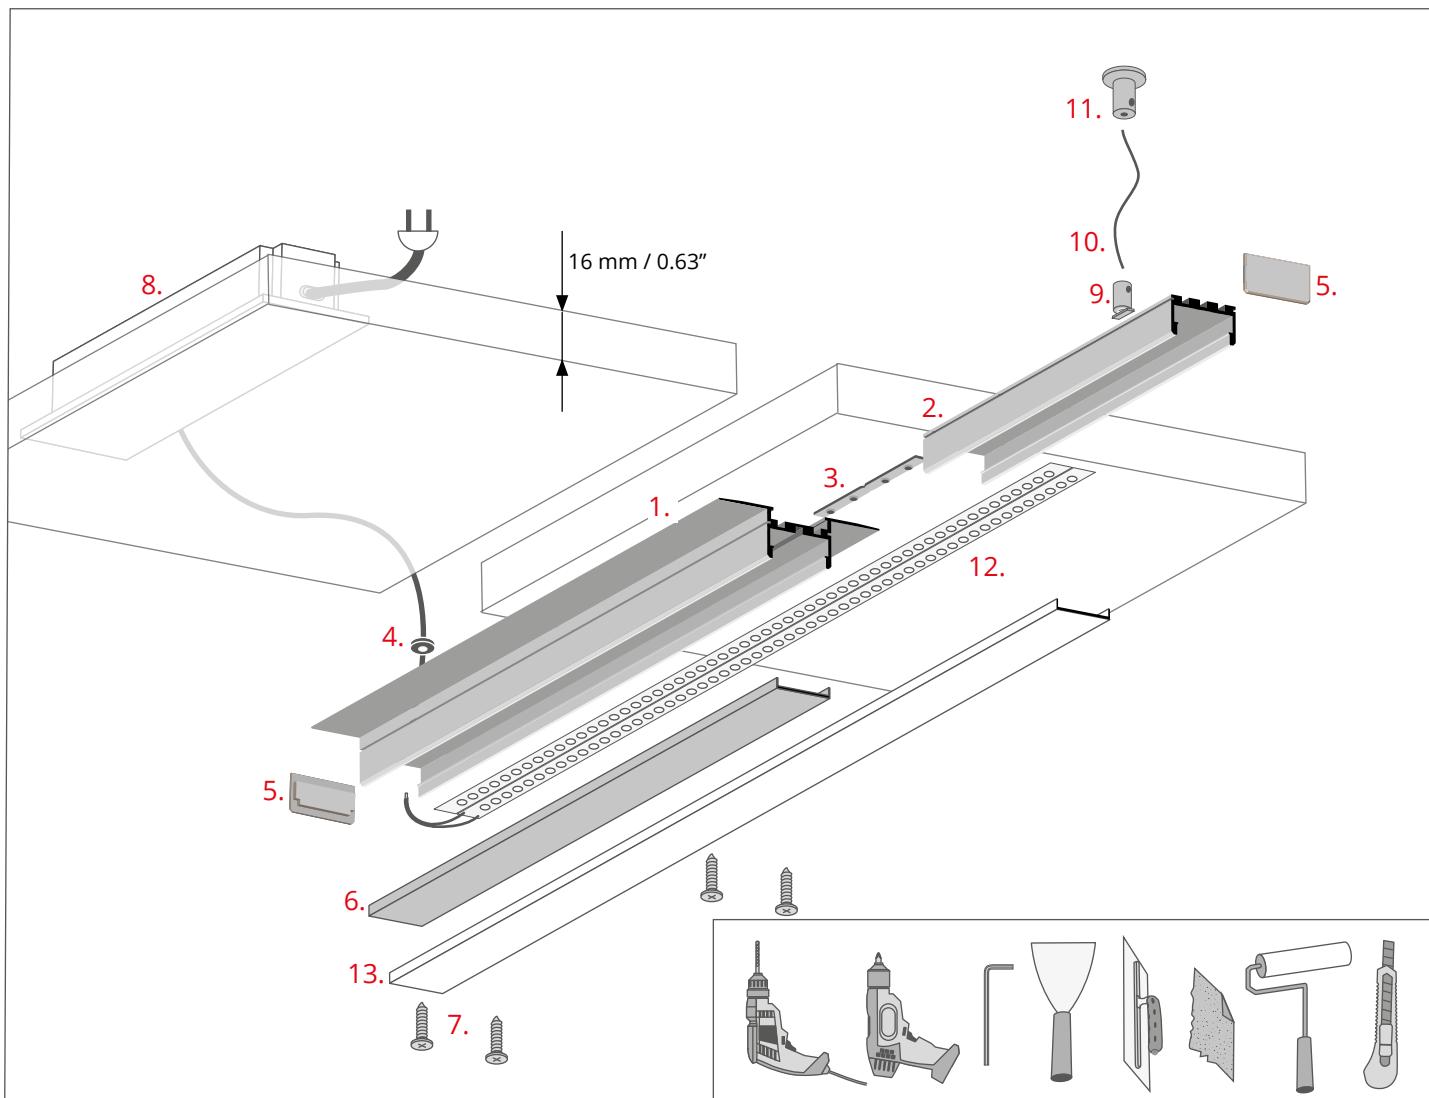

- | | |
|------------------------------------|-------------------------|
| 1. Profil GIZA-LL-UST (Ref. C2724) | 11. Zawieszka sufitowa* |
| 2. Profil GIZA-LL (Ref. C0758) | 12. Taśma LED* |
| 3. Łącznik* | 13. Osłona* |
| 4. Dławnica* | |
| 5. Zaślepka* | |
| 6. Wkładka ochronna* | |
| 7. Blachowkręt | |
| 8. Zasilacz (12 V / 24 V)* | |
| 9. Zawieszka* | |
| 10. Linka* | |

UWAGA! Wszystkie taśmy LED powinny być podłączone do zasilacza 12 V lub 24 V.


WAŻNE: Instrukcja nie pokazuje wszystkich możliwości montażu. Dodatkowe akcesoria powiązane z produktem wraz z instrukcjami montażu dostępne są na stronie

Rysunki profili i akcesoriów w instrukcji są uproszczone i tylko w przybliżeniu oddają rzeczywiste kształty.

GIZA-LL-UST oraz GIZA-LL - instrukcja montażu


a) Instalacja profilu GIZA-LL-UST pomiędzy płytami

Ia

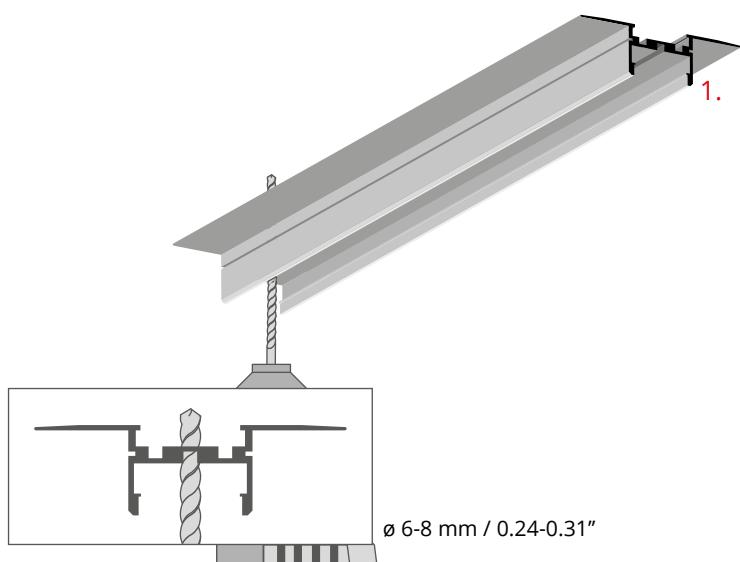


Wywierć w profilu GIZA-LL-UST (1) otwór na przewód zasilający.

IIa

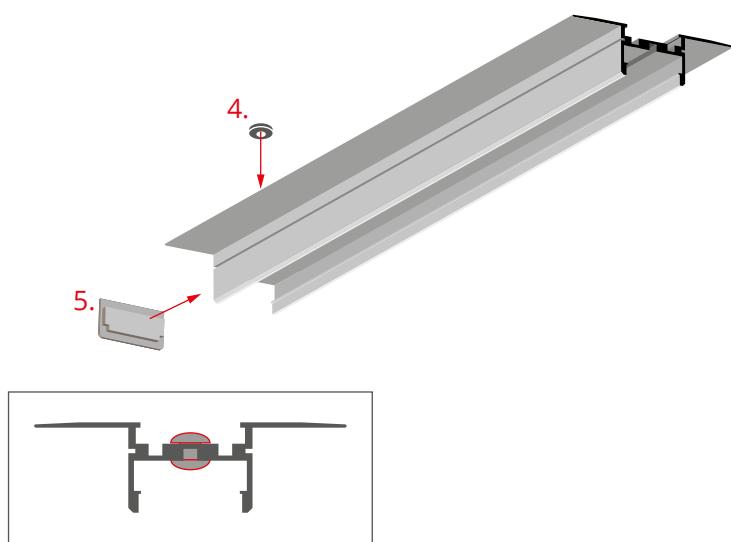

Zamontuj zaślepkę (5) w profilu i dławnicę (4) w nawierconym otworze.

IIIa

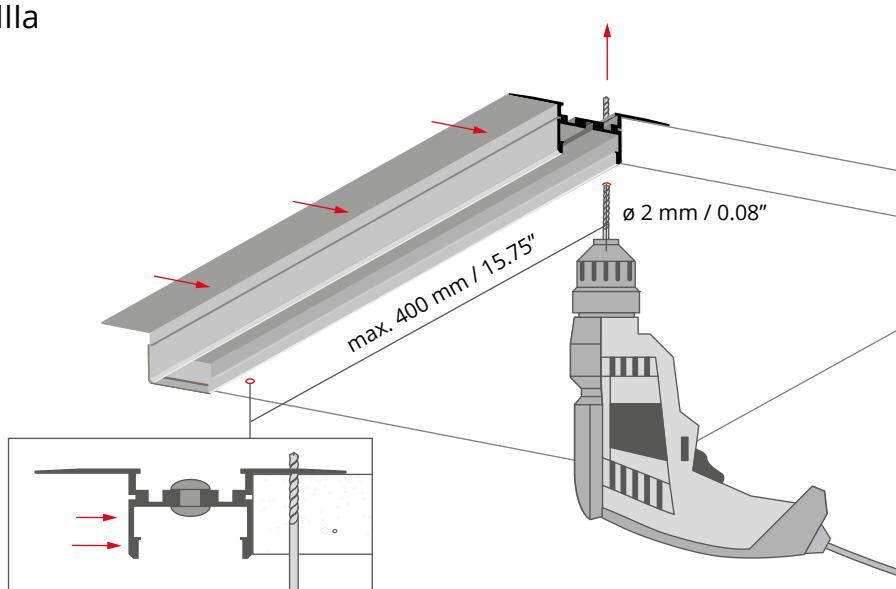


Przyłącz profil do krawędzi płyty gipsowo-kartowej i wywierć otwory, przechodzące przez płytę i kołnierz profilu.

Maksymalna odległość między otworami to 400 mm / 15.75''.

GIZA-LL-UST oraz GIZA-LL - instrukcja montażu

a) Instalacja profilu GIZA-LL-UST pomiędzy płytami

IVa

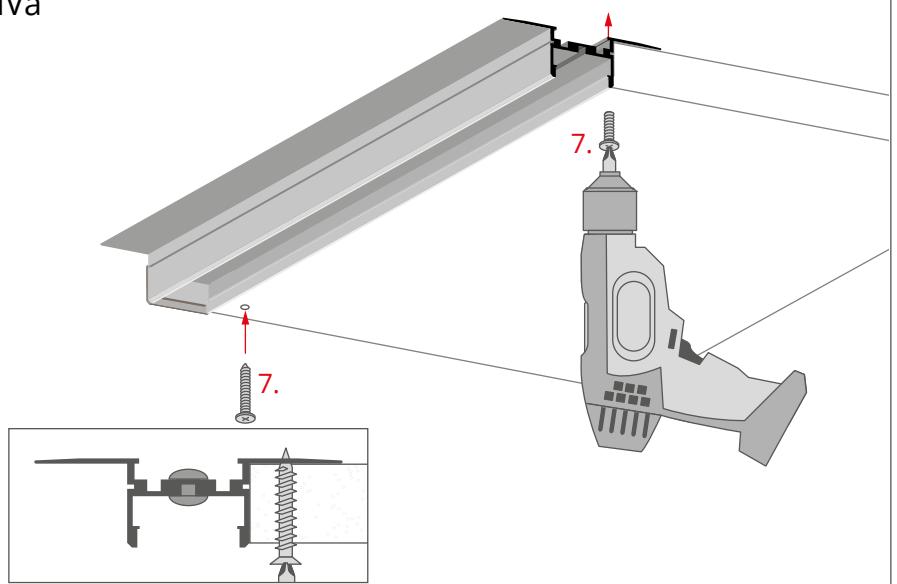


Wprowadź blachowkręty (7)

do nawierconych otworów

i przykręć nimi kołnierz profilu do płyty.

Va

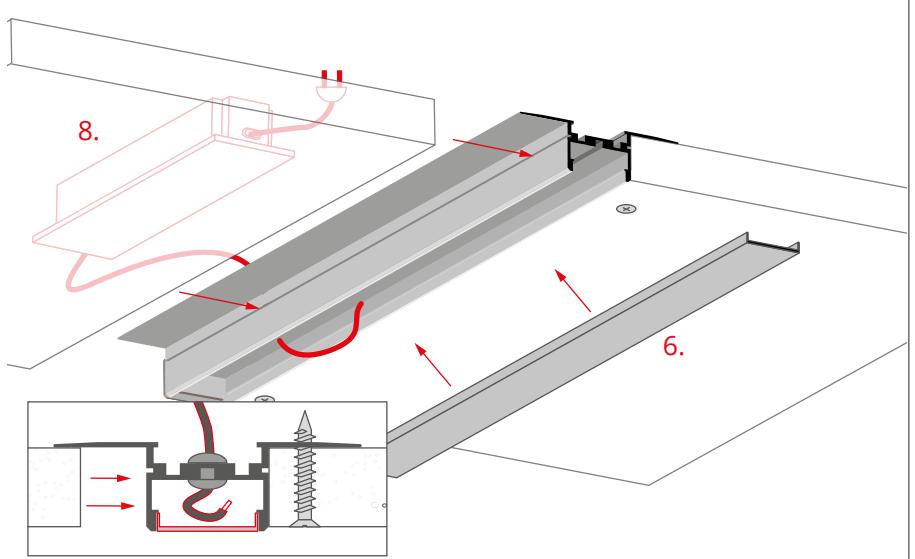


Przeprowadź przewód z zasilacza (8)
przez dławnicę.

Zamontuj w profilu wkładkę ochronną
(6).

Przyłożyć drugą płytę.




Vla

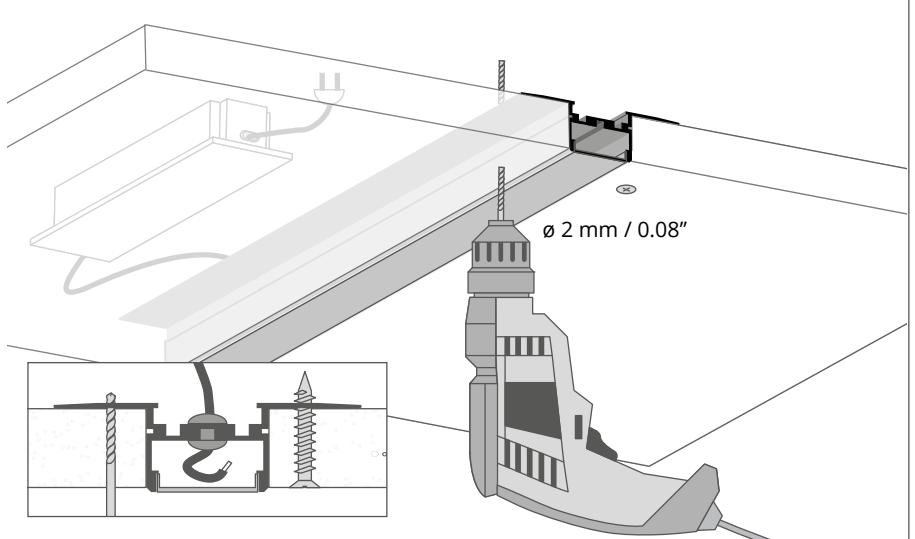

Wywierć otwory w dokładanej płycie
i w kołnierzu profilu.

GIZA-LL-UST oraz GIZA-LL - instrukcja montażu


a) Instalacja profilu GIZA-LL-UST pomiędzy płytami

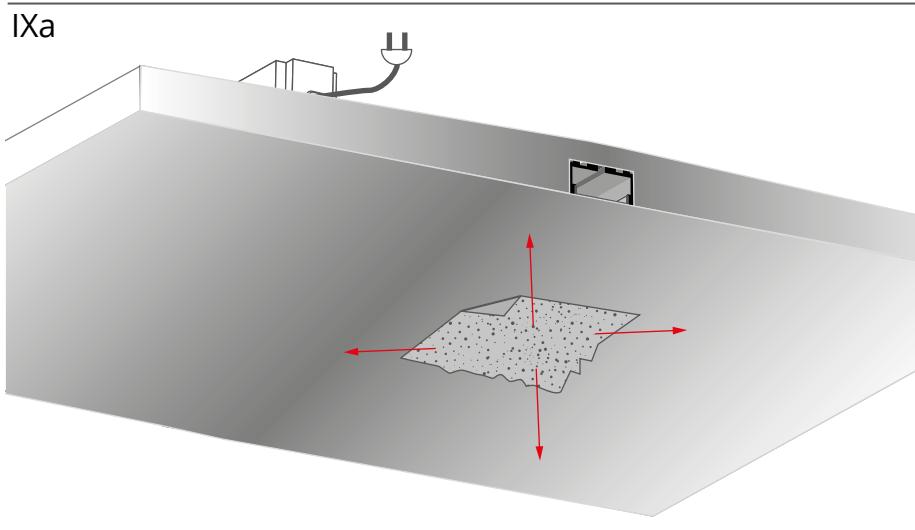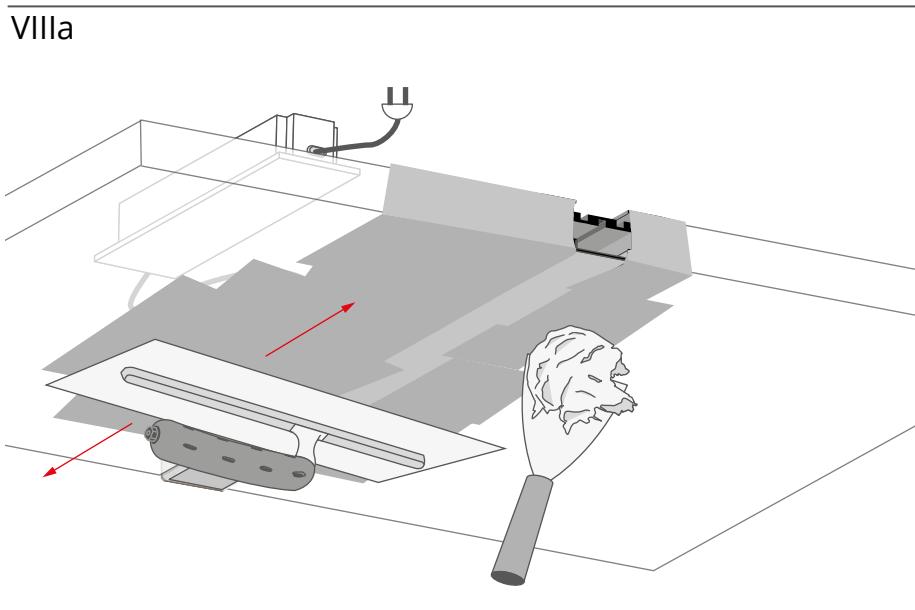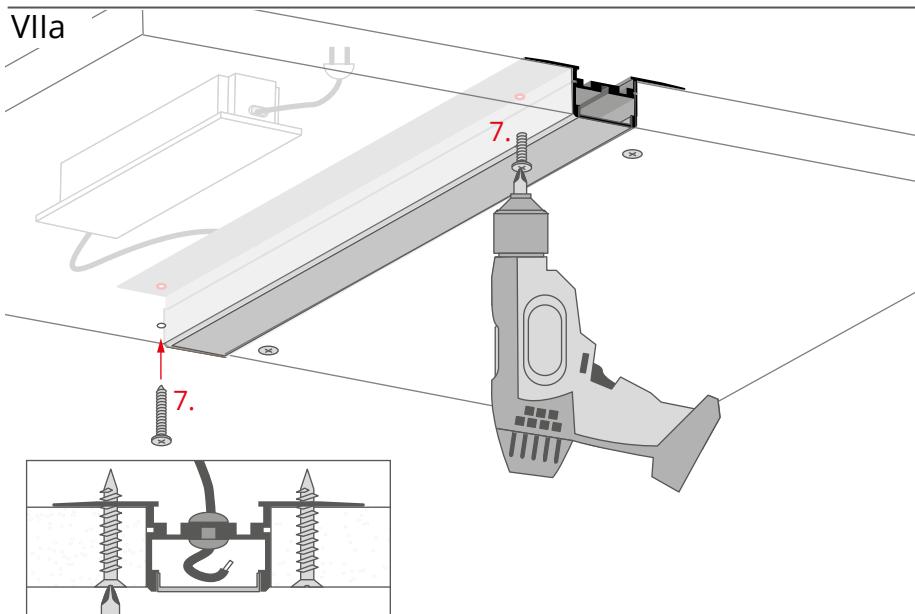

GIZA-LL-UST oraz GIZA-LL - instrukcja montażu


a) Instalacja profilu GIZA-LL-UST pomiędzy płytami

Xa

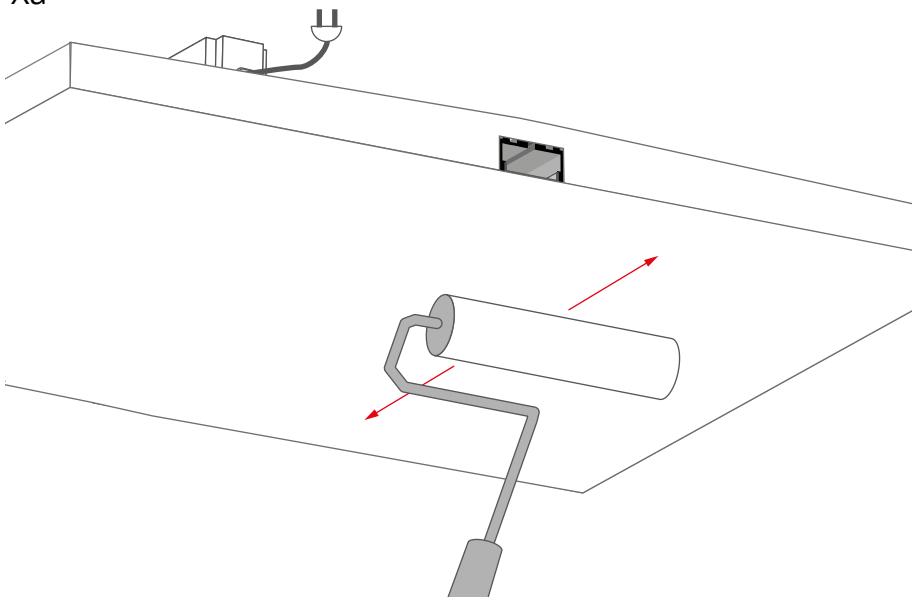


Pomaluj powierzchnię.

XIa

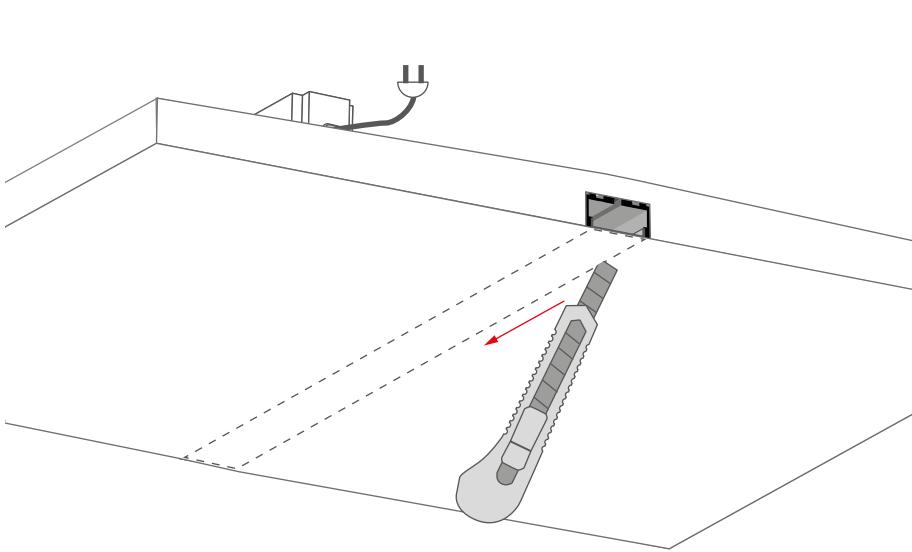

Natnij warstwy farby i gładzi na styku aluminiowej krawędzi profilu i wkładki ochronnej.

XIIa

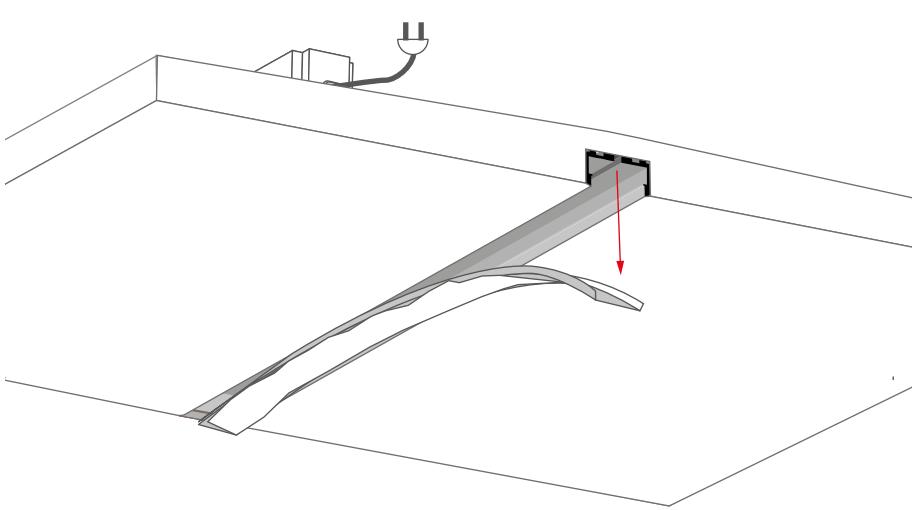


Delikatnie usuń wkładkę ochronną.

GIZA-LL-UST oraz GIZA-LL - instrukcja montażu

a) Instalacja profilu GIZA-LL-UST pomiędzy płytami


XIIIa

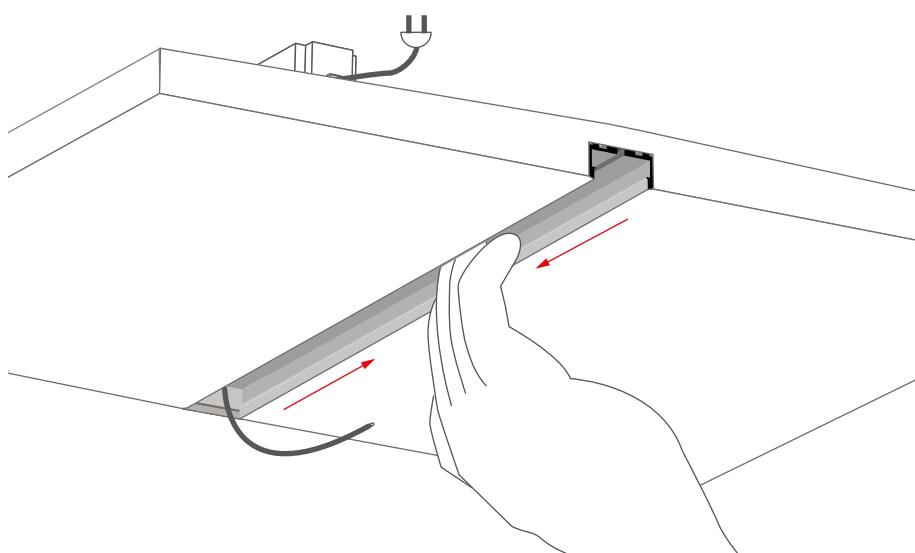

Wygładź krawędzie profilu.

Wyjmij przewód zasilający z wnętrza profilu.

XIVa

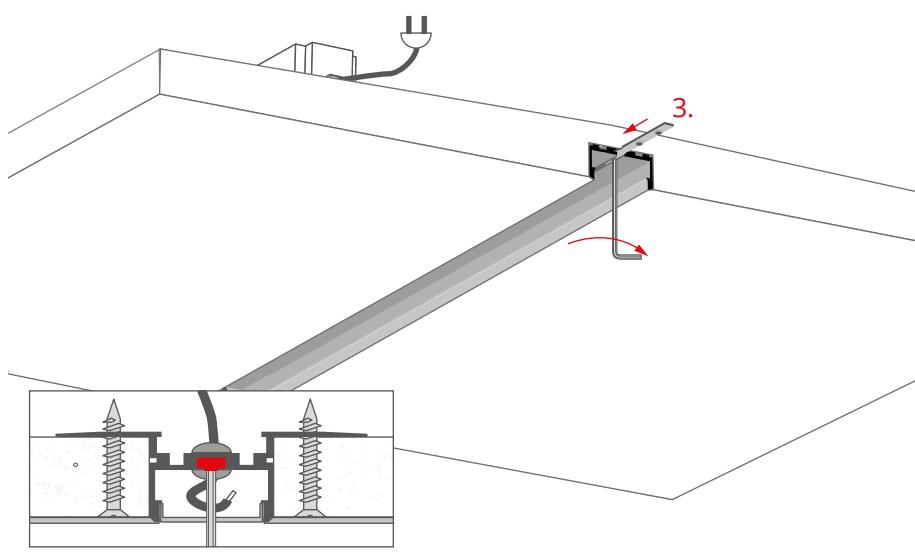


Wprowadź łącznik (3) w kanał wewnętrzny profilu i dokręć wkręty blokujące kluczem ampulowym.

GIZA-LL-UST oraz GIZA-LL - instrukcja montażu


b) Instalacja profilu GIZA-LL jako przedłużenie oprawy

Ib

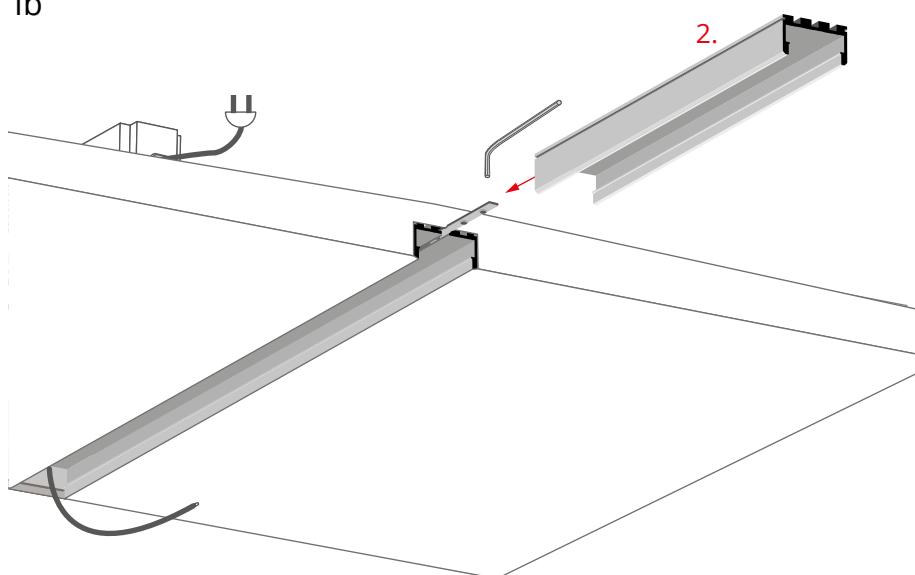


Nałożyć profil GIZA-LL (2) kanałem wewnętrznym na wystającą część łącznika. Następnie dokręcić wkręty łącznika kluczem ampulowym.

IIb

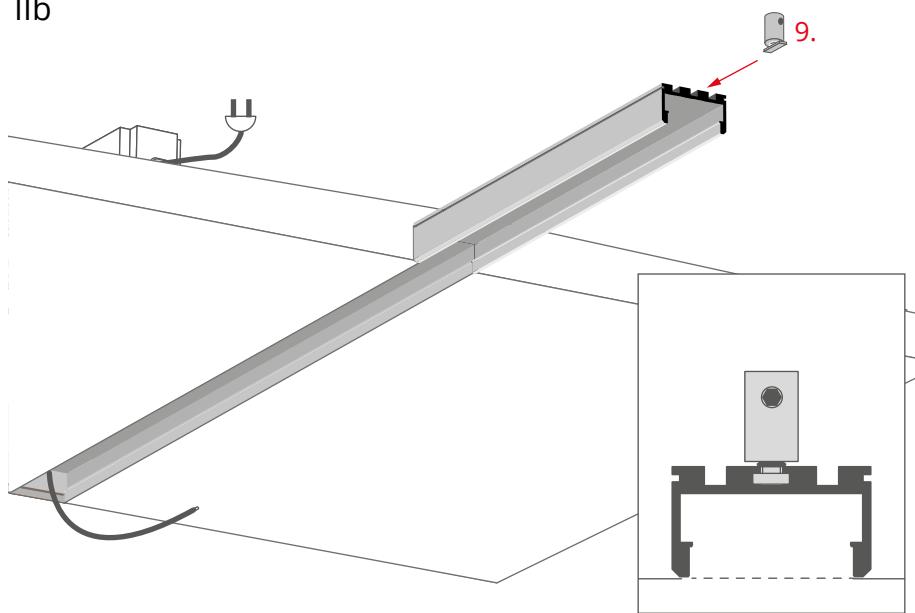

Wsuń zawieszkę (9) w kanał grzbietowy profilu.

IIIb

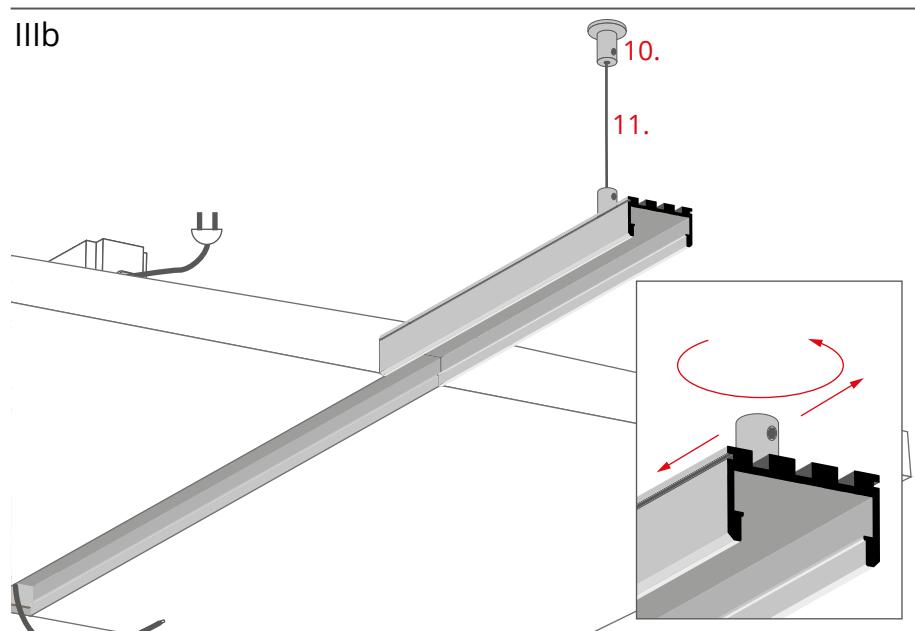


Połącz zawieszkę sufitową (10) i zawieszkę w profilu linką (11).

(Więcej informacji dotyczących systemów podwieszeń dostępnych jest na stronie internetowej).

GIZA-LL-UST oraz GIZA-LL - instrukcja montażu
b) Instalacja profilu GIZA-LL jako przedłużenie oprawy


IVb

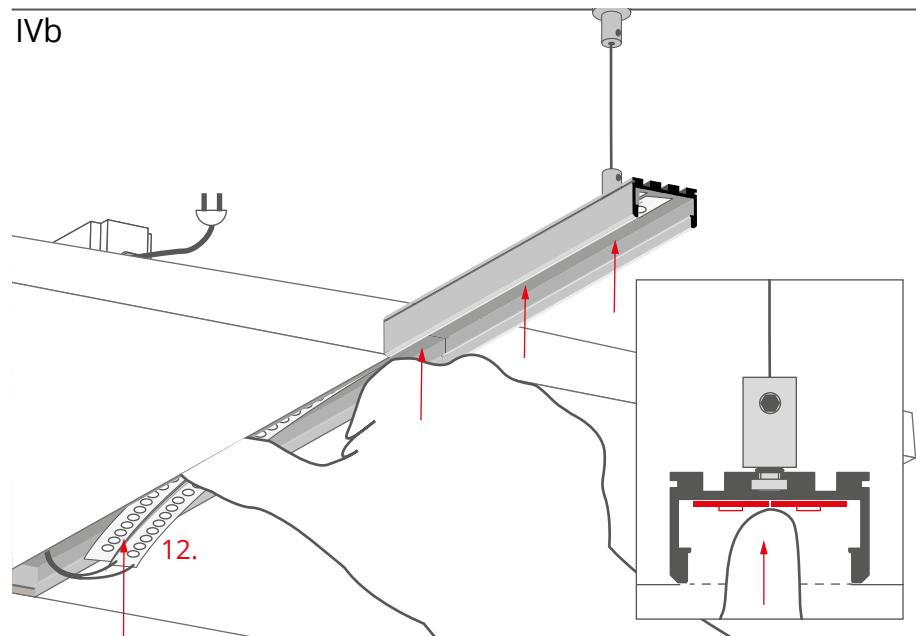

Podłącz taśmy LED do zasilania.

Włóż Taśmę LED (12) do profilu.

Vb

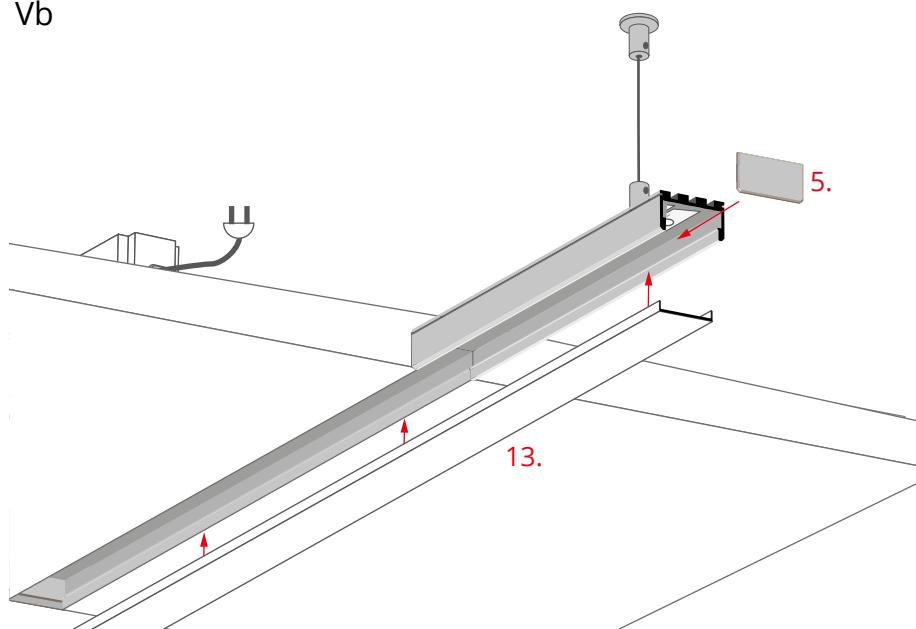

Zamontuj zaślepkę (5) oraz osłonę (13).