

Link zum Produkt: <https://treppenbeleuchtung.info/futc03-scheinwerfer-milight-15w-rgbccct-led-gartenlicht-p-2192.html>

FUTC03 Scheinwerfer MILIGHT - 15W RGB+CCT LED Gartenlicht

Preis	93.13 Euro
Verfügbarkeit	Vorhanden
Versanddauer	3 Tage
Katalognummer	2192
Erzeuger	Mi.Light

Produktbeschreibung

Multifunktionsgerät als Controller fungieren, ermöglicht es Ihnen, die Beleuchtung über WLAN in Ihrem Haus steuern mit Hilfe von Geräten, die auf Android oder IOS.

Router MI LIGHT ermöglicht es Ihnen, zu Ihrem Heimnetzwerk zu verbinden, so dass Sie nicht mehr benötigen, um zwischen drahtlosen Netzwerken wechseln. MILIGHT Router ermöglicht Ihnen auch, Licht zu steuern, auch wenn Sie nicht zu Hause sind.

Wi-Fi-Router verwendet werden, um alle Geräte 2.4G intelligente Beleuchtung unterstützt werden: Glühlampen RGB, RGBW, dimmbare Beleuchtung etc. Diese einfachen Vorrichtung können Sie Ihre Lichtsteuerung mit einem Smartphone auf Basis von iOS oder Android, eine neue kostenlose Anwendung verfügbar im Appstore oder Google Play (MI.LIGHT).

Produktname: 15W RGB+CCT LED-Gartenlampe

Modell Nr.: FUTC03

Leistung: 15W

Eingangsspannung: AC100~240V 50/60 Hz

Farbtemperatur: 2700K~6500K

Lichtstrom: 1200LM

Lichtausbeute: 80LM/W

CRI: >80

PF: >0,5

Lebensdauer: 50000 Stunden

Abstrahlwinkel: 15°

Beleuchtungsabstand: > 10 m

IP-Rate: IP65

Material: Aluminium

Anwendungsgebiete : Garten, Türen, Garagen

15W RGB+CCT Smart LED Garden Lamp

2.4G RF remote control & Smartphone APP control, Automatic commands transmitting function, Auto-synchronization



16 Million Colors



Dimmable & Saturation Control




CCT Adjustable





Brightness adjustable & Color temperature adjustable

Brightness adjustable, Adjust the color temperature from 2700-6500K,
make the light you want

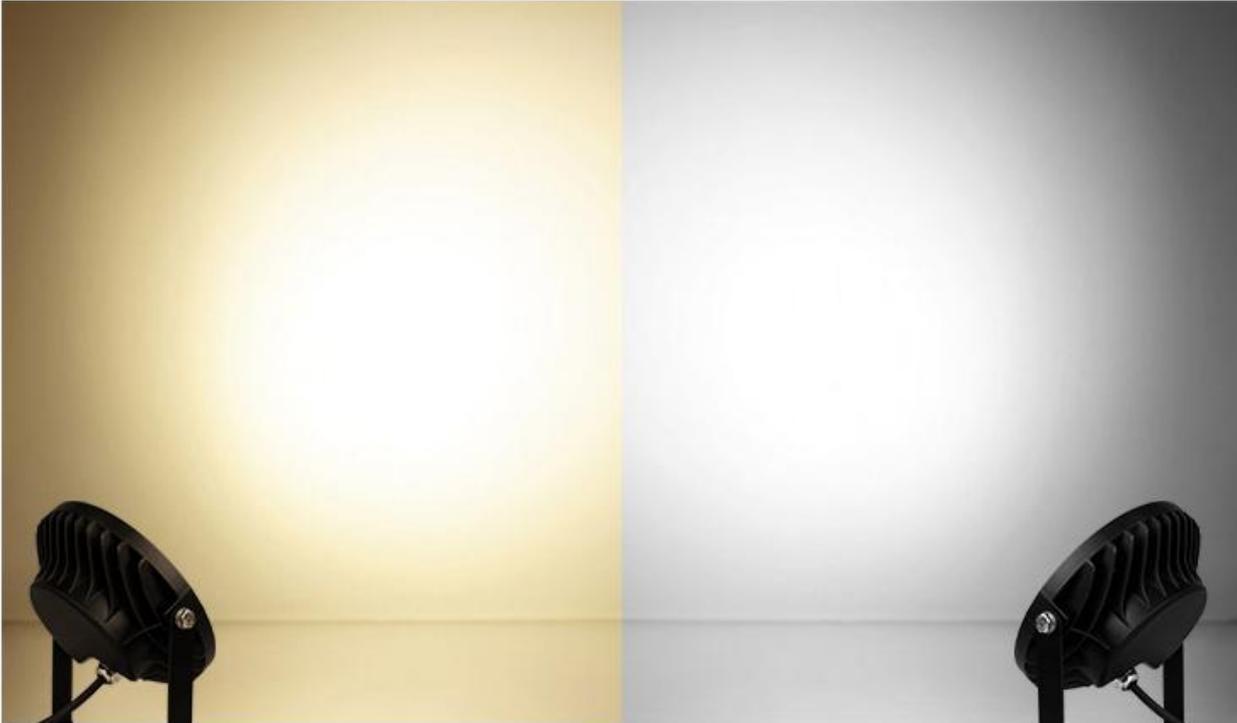

2.4GHz remote control Smartphone APP control

Wireless remote and smartphone control, realize the multi-functional setting,
experience smart home life

* Need WiFi iBox for smartphone APP control




Compatible with



Symmetrical and centralized light ray

Beam Angle 15° Irradiation distance 10m

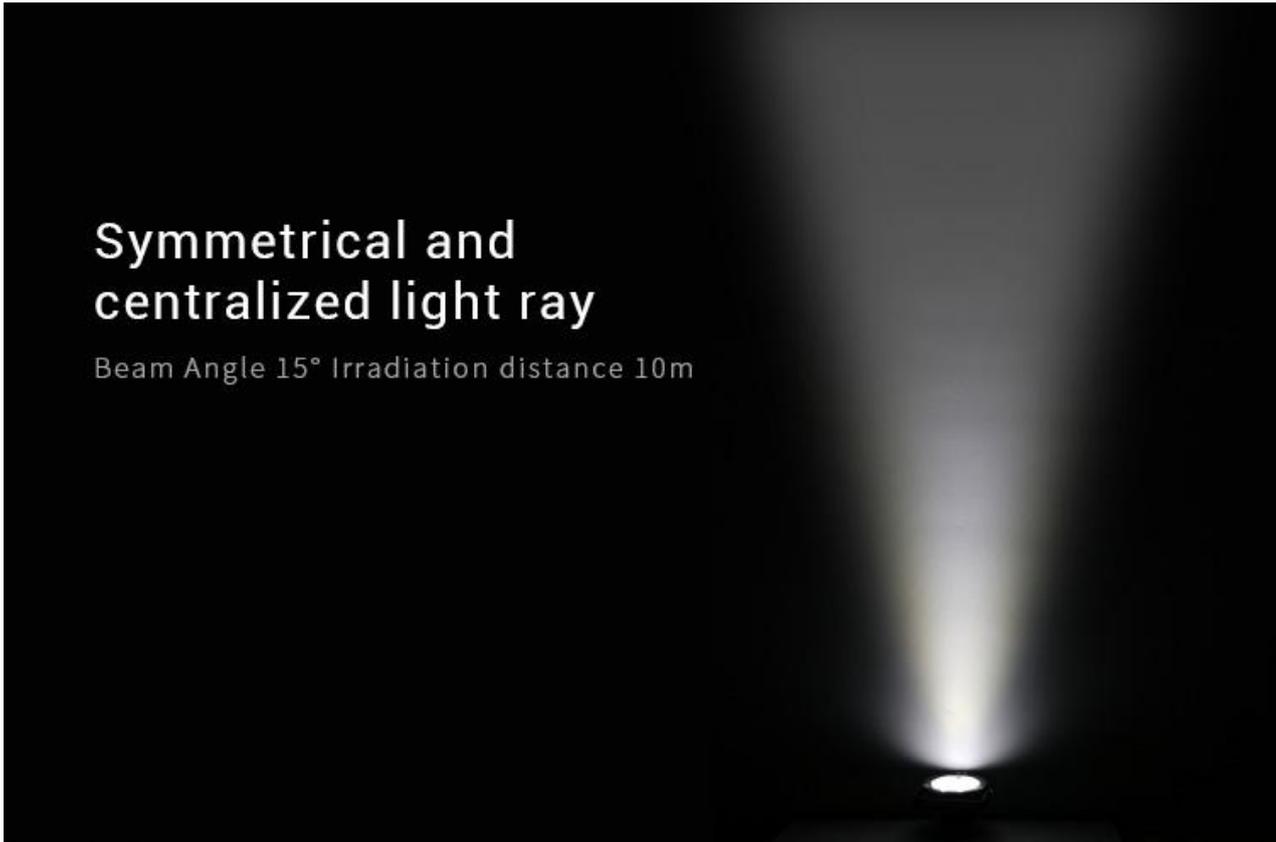

Waterproof and
Dustproof rate: IP65




Auto-transmitting Diagram

One Garden Light can transmit the signals from the remote control to another Garden Light within 30m, as long as there is a Garden Light within 30m, the remote control distance can be limitless.

Auto-synchronization function

Different Garden Light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed.

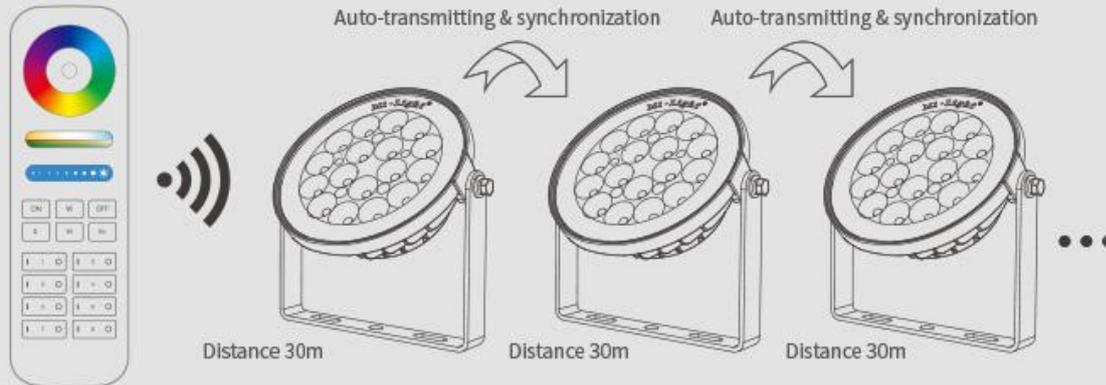

Freely Adjustment, Easy & Convenience

360° Rotate Moving, 180° Vertical Moving, Easy To Adjust



High Efficient LED Chips

Adopt Philips LED Chips
CRI>80, highly object colors restore
Better heat dissipation and longer lifespan



Constant Current & Constant Voltage driver

built-in smart IC to stabilize current and voltage
protect lamp, eradicate flickering

Optical Lens

Anti-dazzling optical lens; diverging light scientifically. Symmetrical and bright light ray



High efficiency heat dissipation

Integrative Aluminum design; Inserted thermal conduction, with thermal convection in air movement, Protect light source lifespan

Power cable nut


Adopt stainless steel materials
waterproof and dustproof
Never Rusting



Anticorrosion inserted pole

High quality Aluminum, longer and more thick
strong anticorrosion

Part of application area

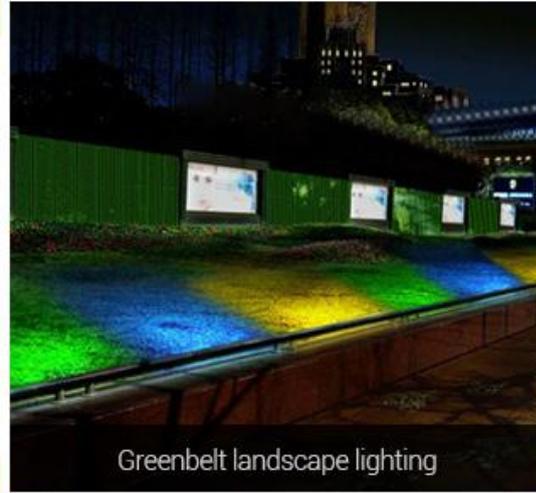

Installation Diagram

