

Link zum Produkt: <https://treppenbeleuchtung.info/futll1-18w-rgbccct-led-linear-light-p-2658.html>



FUTLL1 18W RGB+CCT LED Linear Light

| | |
|---------------|-------------------|
| Preis | 78.07 Euro |
| Verfügbarkeit | Vorhanden |
| Versanddauer | 14 Tage |
| Katalognummer | 2658 |
| Erzeuger | Mi.Light |

Produktbeschreibung

- **Product Name: 18W RGB+CCT LED Linear Light**
- Model No.: LL1-18
- Input Voltage: AC100~240V 50/60Hz
- Color Temp.: 2700~6500K
- Luminous Flux: 1900LM
- Luminous Efficiency: 105LM/W
- CRI: >80
- Working Temp.: -20~45°C
- Beam Angle: 140°
- RF: 2.4GHz
- Control Distance: 30m
- IP Rate: IP66
-

RGB+CCT LED Linear Light

2.4GHz remote control | third party voice control | 16 million colors
color temperature, brightness, and saturation adjustable
signal transmitting & modes synchronization



Adjustable
16 million colors



Adjustable
color temperature





Brightness
saturation



IP66
waterproof



Signal transmitting &
modes synchronization

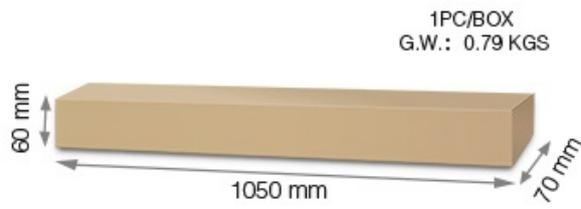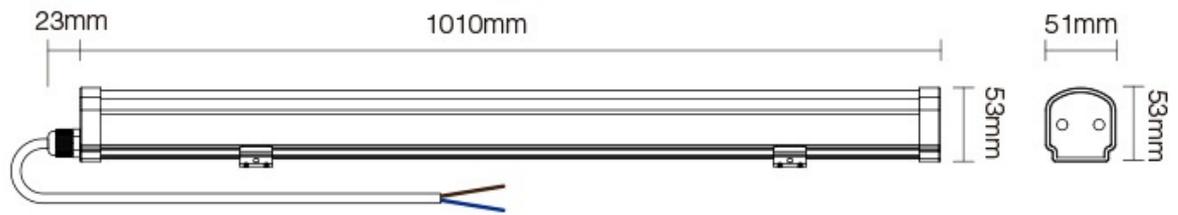

2.4GHz remote control

The 2.4GHz remote control can be used to control the lamps and the control distance is up to 30m



Compatible with



Support Smart phone APP control and third party voice control

It need 2.4GHz gateway(WL-Box1) for smart phone control or third party voice control






16 million colors&saturation adjustable



Create a smart lighting atmosphere to meet all your needs



Free adjustment of color temperature and brightness
create various lighting environments

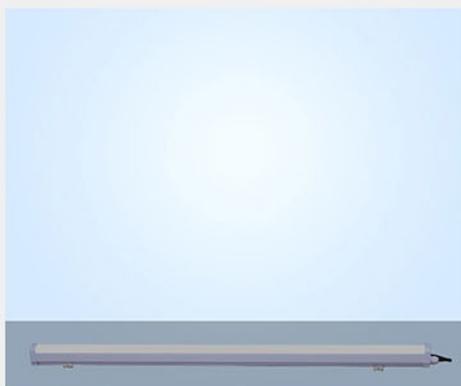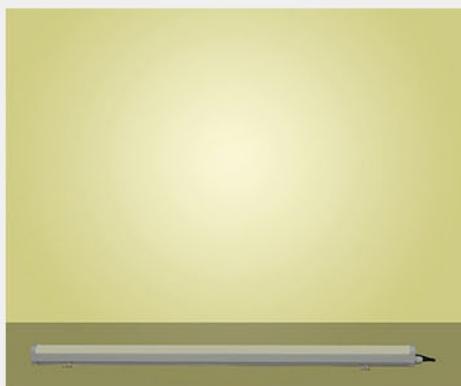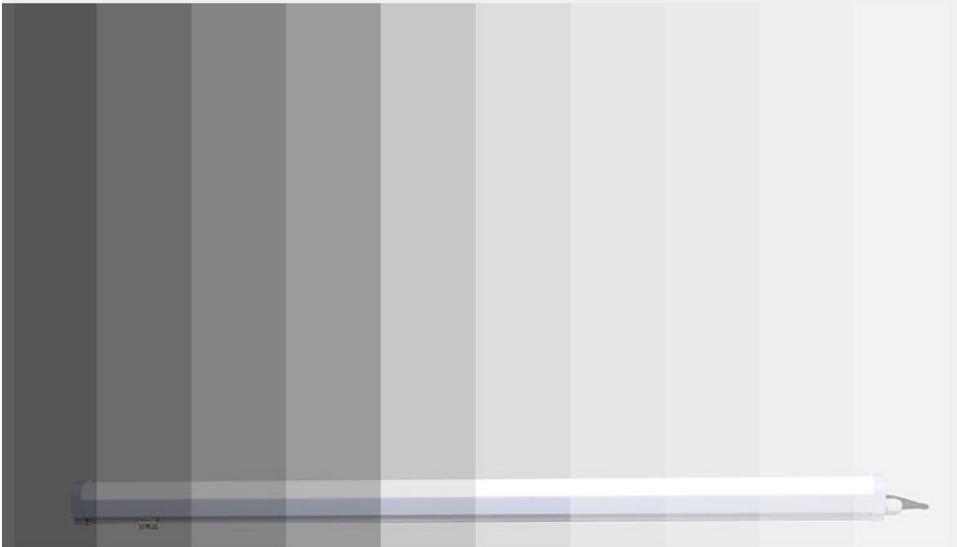

2700K


6500K

Signal transmitting

One Linear Light can transmit the signals from the remote control to another Linear Light within 30m, as long as there is a Linear Light within 30m, the remote control distance can be limitless.

Modes synchronization

Different Linear Light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

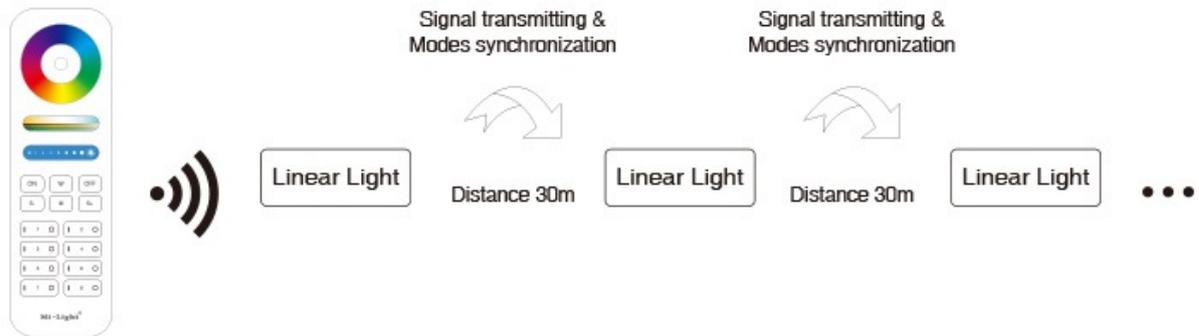



IP66 Waterproof Rate

Waterproof and dustproof, can be used in rainy, humid, dusty environment



Highlight LED Lamp Beads

18W LED lamp beads, low energy consumption
low light decay, bright color, high brightness

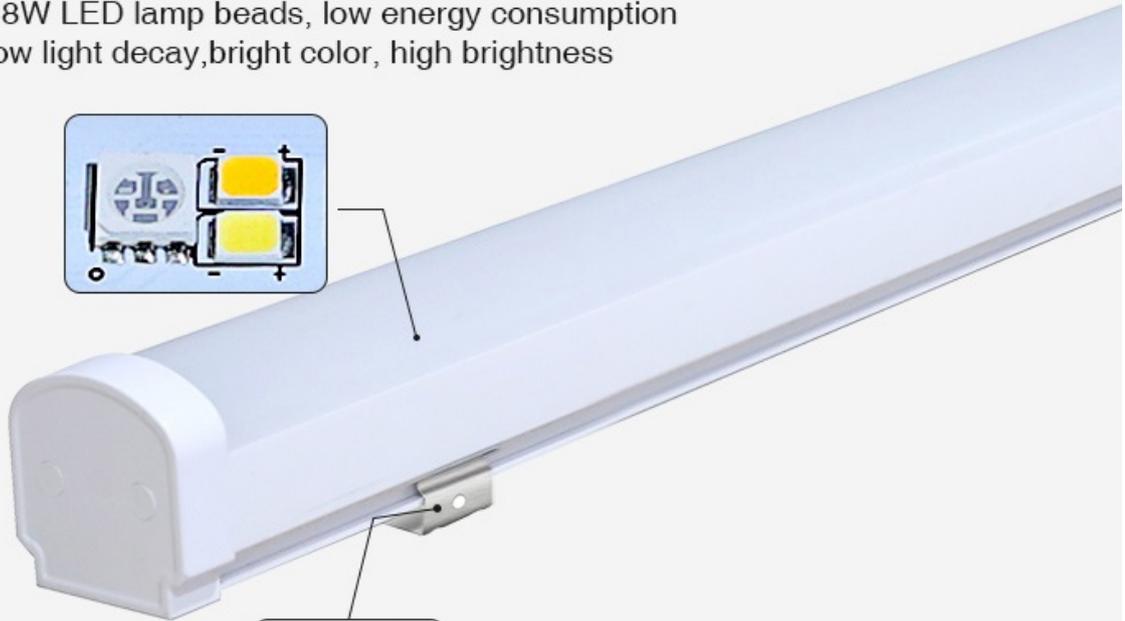

U-shaped buckle

304 stainless steel, strong and durable
easy to install

140° beam angle

Broaden your high-definition
vision and pursue a
broader realm



Anti-UV PC

Good light transmission
integrated injection



Acrylic soft light mask

Bright and uniform light, easy to
create a comfortable atmosphere
at home



Input voltage


AC100V~240V

Plug screw

Waterproof and dustproof, tight
and firm wiring, not easy to
fall off

RGB+CCT Linear Light

Suitable for multiple regions
Surface mounting | hoisting

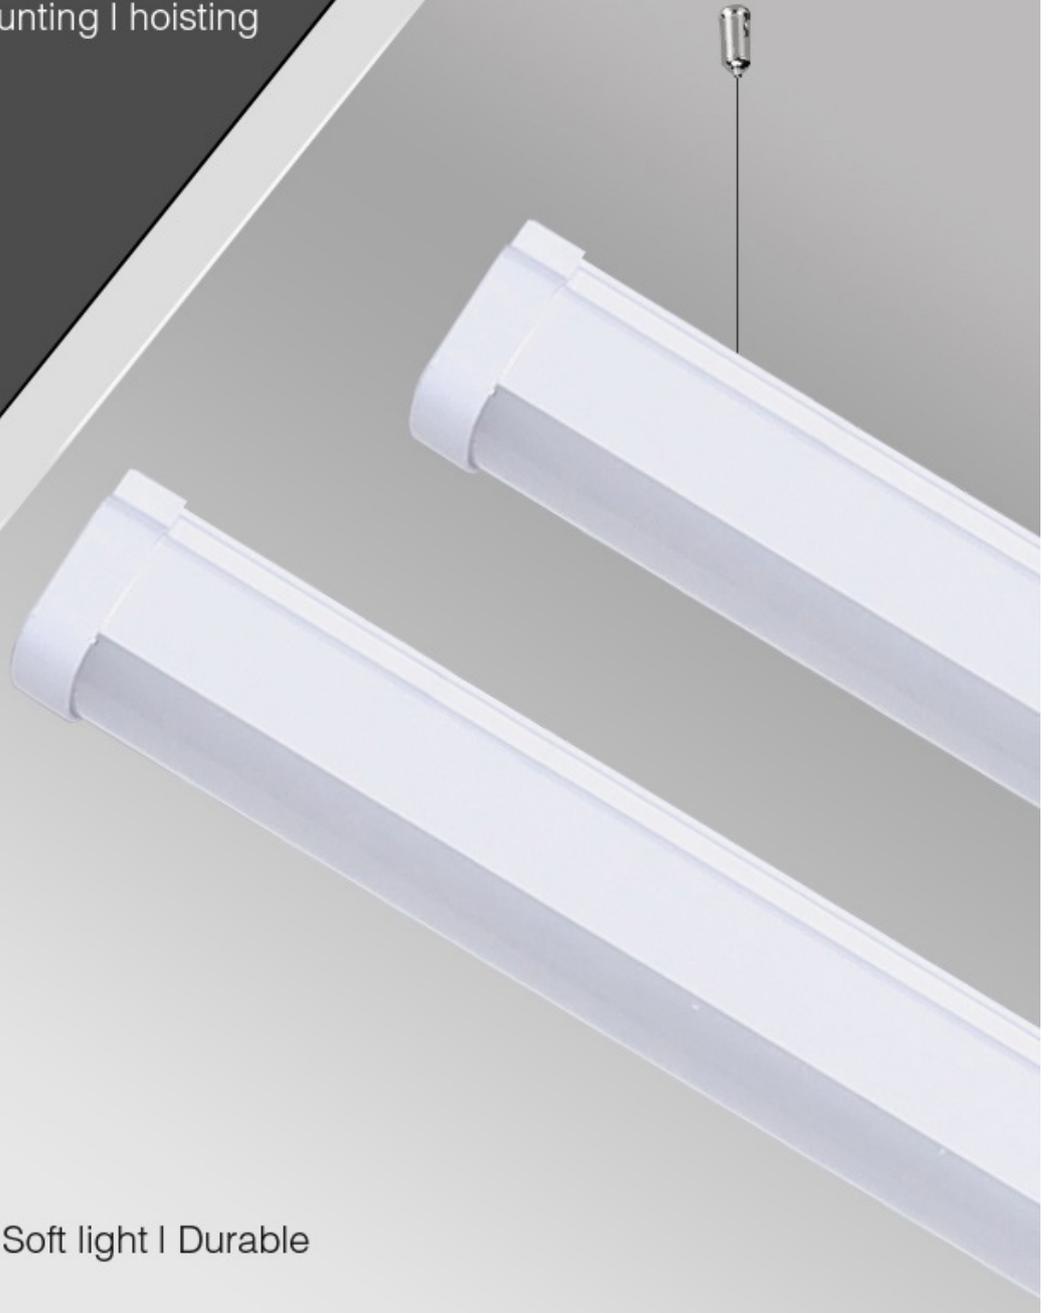

Easy to fix | Soft light | Durable

Wide range of applications

Living room | Bedroom | Wardrobe | Cabinet | Showcase | Office



- Luminous Flux: 1200LM
- CRI: >80
- PF: >0.5
- Lifespan: 50000 hours
- Beam Angle: 60°
- Control Distance: 30m

18W Anti-glare RGB+CCT LED Downlight

Anti-glare designing; 2.4G RF remote controller, 16 million color change; Saturation, color temperature and brightness adjustable; Auto-sync and auto-transmitting function make the control distance limitless



16 Millions of colors to choose



Color temperature 2700~6500K



Dimmable Saturation control



Support third party voice control




Signal transmitting & Modes synchronization






Hole Size: $\varnothing 120\text{-}125\text{mm}$

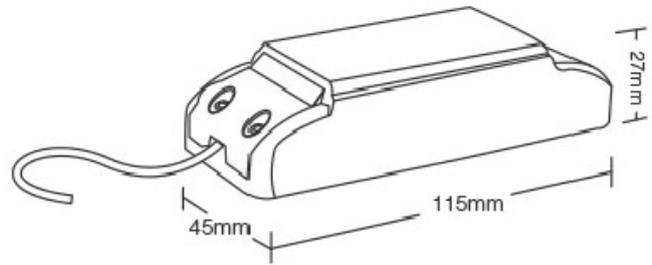

1PC/BOX
G.W.: 0.55KGS

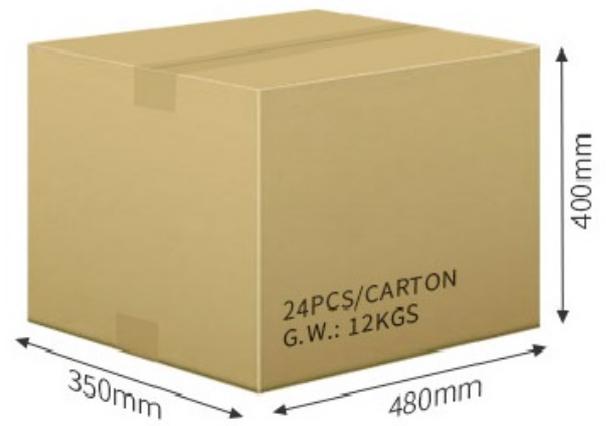

2.4GHz RF Remote Control

Controlled by 2.4GHz remote, control distance is 30M



Compatible with


FUT089


FUT088


FUT092


FUT096


B8


B4/T4


B3/T3


B0


WL-Box1

Support Smart phone APP control and third party voice control

It need 2.4GHz gateway(WL-Box1) for smart phone control or third party voice control



16 million color change freely

Make the lighting atmosphere you want easily
satisfy your more using requirements



Warm white to cool white adjustable freely stepless brightness dimming

Color temperature: 2700K~6500K, steplessly adjust the lamp brightness
Soft and delicate light satisfy different lighting requirements



Deeply anti-glare design

Refraction material and deepened cover prevent glare effectively and offer you healthy ambient light



Anti-glare range
(shielding angle) $>30^\circ$



Signal Transmitting

One Downlight can transmit the signals from the remote control to another downlight within 30m, as long as there is a downlight within 30m, the remote control distance can be limitless.

Modes Synchronization

Different downlight can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.



Constant Current & Voltage Driver

Constant current & Voltage driver; Stable Current and Voltage
improve the lifespan of the lights



Spring Clip





