

Link zum Produkt: <https://treppenbeleuchtung.info/fut060-miboxer-downlight-wi-fi-25w-p-1699.html>

FUT060 MiBoxer - Downlight Wi-Fi 25W

Preis	78.07 Euro
Verfügbarkeit	Waren nicht verfügbar sind
Versanddauer	4 Tage
Katalognummer	1699
Erzeuger	Mi.Light

Produktbeschreibung

Multifunktionsgerät als Controller fungieren, ermöglicht es Ihnen, die Beleuchtung über WLAN in Ihrem Haus steuern mit Hilfe von Geräten, die auf Android oder IOS.

Router MI LIGHT ermöglicht es Ihnen, zu Ihrem Heimnetzwerk zu verbinden, so dass Sie nicht mehr benötigen, um zwischen drahtlosen Netzwerken wechseln. MILIGHT Router ermöglicht Ihnen auch, Licht zu steuern, auch wenn Sie nicht zu Hause sind.

Wi-Fi-Router verwendet werden, um alle Geräte 2.4G intelligente Beleuchtung unterstützt werden: Glühlampen RGB, RGBW, dimmbare Beleuchtung etc. Diese einfachen Vorrichtung können Sie Ihre Lichtsteuerung mit einem Smartphone auf Basis von iOS oder Android, eine neue kostenlose Anwendung verfügbar im Appstore oder Google Play (MI.LIGHT).

Produktname: 25 W RGB+CCT-LED-Downlight

Modell Nr.: FUT060

Leistung: 25W

Eingangsspannung: AC100~240V 50/60Hz

Farbtemperatur: 2700K~6500K

Lichtstrom: 2000LM

Lichtausbeute: 80LM/W

CRI: >80

PF: >0,5

Lebensdauer: 50000 Stunden

Abstrahlwinkel: 120°

Kontrollabstand: 30 m

Lochgröße: ø200~210mm

Material: Aluminium

Anwendungsgebiete : Büros, Gewerbeflächen , Wohnungen

25W RGB+CCT LED Downlight

2.4GHz Remote control & APP control, Support Third Party Voice Control



16 Millions of
colors to choose



Color temperature
2700~6500K



Dimmable
Saturation control



Signal transmitting &
Modes synchronization

2.4GHz remote control Smartphone APP control

Wireless remote and smartphone control, realize the multi-functional setting,
experience smart home life.

* Need 2.4GHz gateway for smartphone APP control



Compatible with



FUT089



FUT088



FUT092



FUT096



B8



B4/T4



B3/T3



B0



WL-Box1

Support third party voice control

It need 2.4GHz gateway (WL-Box1) for third party voice control



16 million colors | Saturation control

16 millions color change and color saturation control,
easily make the light atmosphere you want



Adjust warm white to cool white randomly

Adjust the color temperature from 2700-6500K, make the light you want




2700K

6500K

Brightness adjustable

Adjust the brightness according to your need

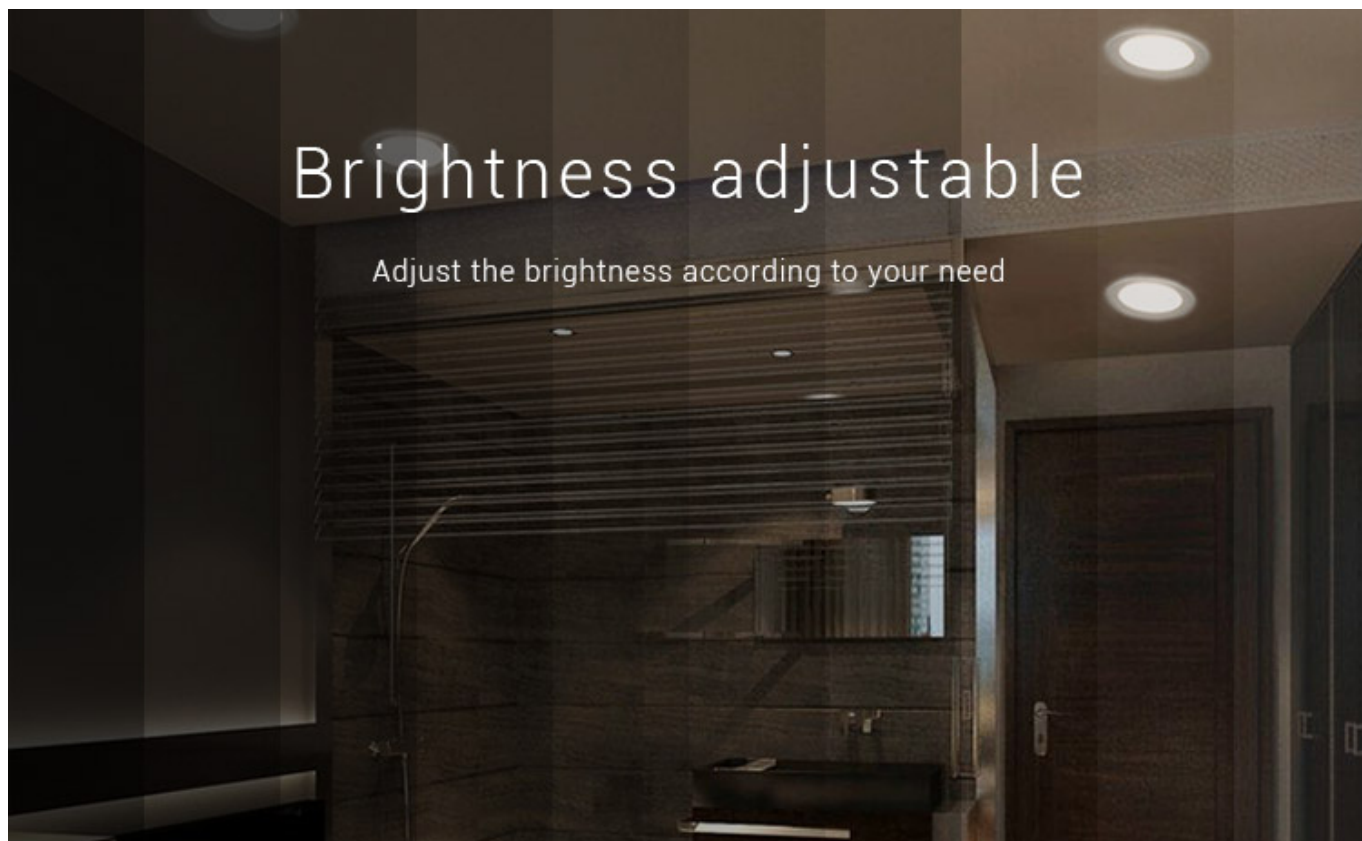


Signal transmitting

One Downlight can transmit the signals from the remote control to another downlight within 30m, as long as there is a downlight within 30m, the remote control distance can be limitless.


Modes synchronization

Different downlight can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

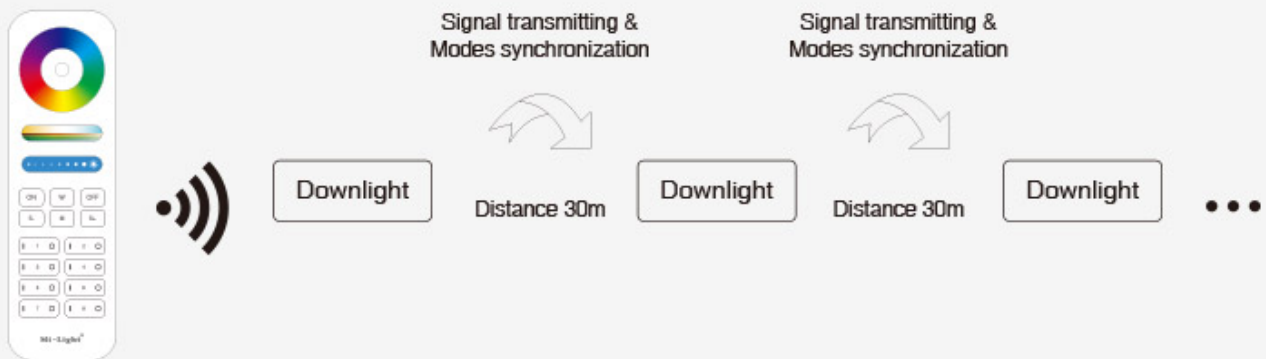

High light transmitting cover

High light transmitting rate; More bright and soft light

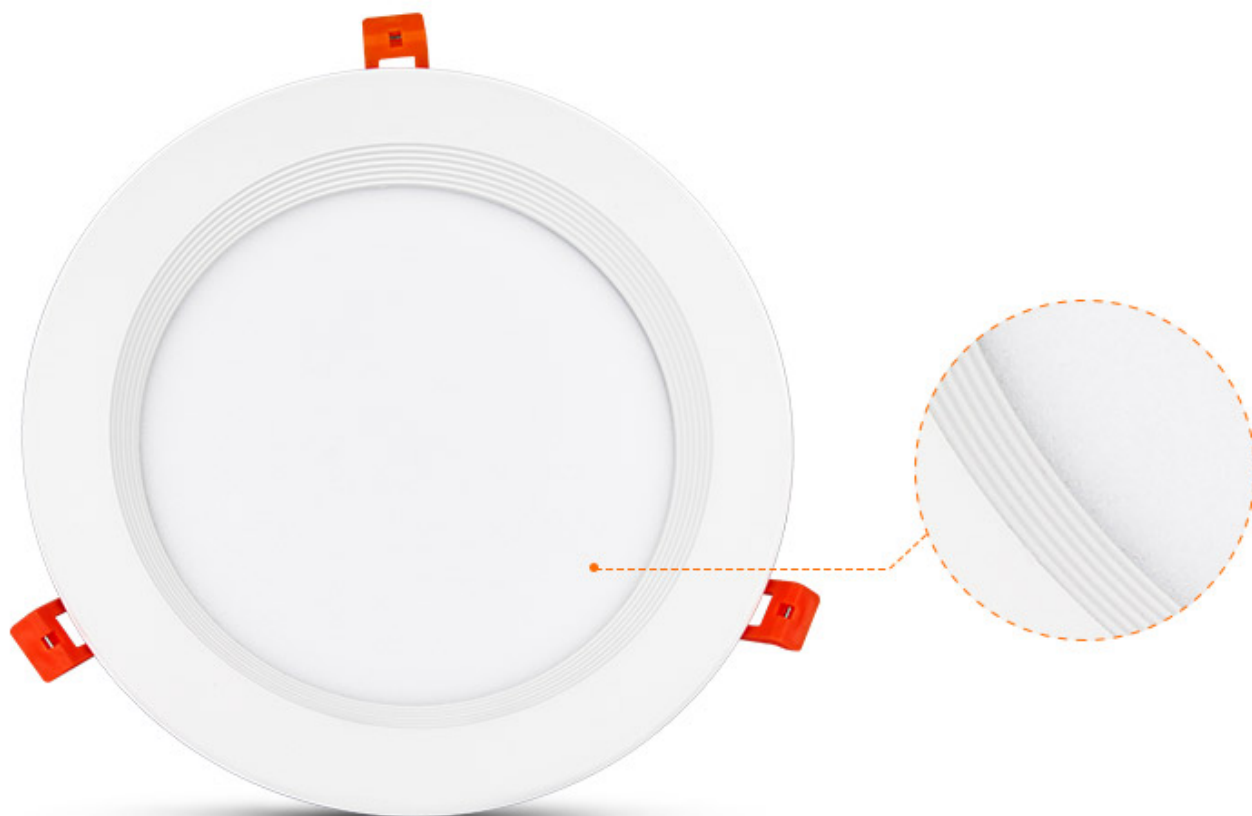

Stainless steel spring clip

Strong spring clip make the installation more stable




Whole die-casting Aluminum Housing

Precision Aluminum, anti-corrosion and fast heat dissipation



Constant current & Voltage driver

Constant current & Voltage driver; Stable Current and Voltage;
improve the lifespan of the lights

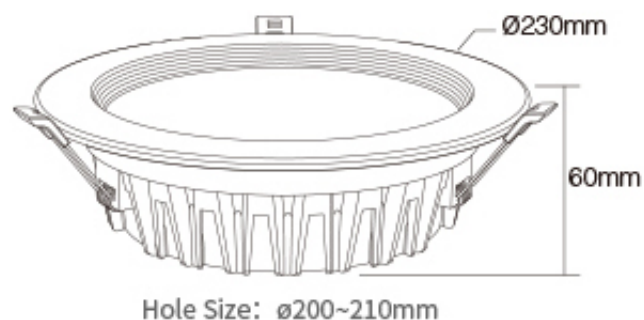

Produkt besitzt zusätzliche Optionen

Lichtfarbe - MILIGHT: RGB + WW , RGB + CW , CW/WW