

Link zum Produkt: <https://treppenbeleuchtung.info/scheinwerfer-milight-rl2-48-48w-rgbccct-led-wall-washer-light-p-2330.html>

Scheinwerfer MILIGHT -RL2-48 48W RGB+CCT LED Wall Washer Light

Preis	317.30 Euro
Verfügbarkeit	Vorhanden
Versanddauer	14 Tage
Katalognummer	2330
Erzeuger	Mi.Light

Produktbeschreibung

Produktname: RGB + CCT LED Wall Washer Licht
Modell Nr.: RL2-48
Eingangsspannung: AC100~240V 50/60Hz
Leistung: 48W
Arbeitstemperatur: -20~60°C
Farbtemperatur: 2700 ~ 6500 K
Lichtstrom: 2800LM
Lichtausbeute: 60LM/W
CRI: >70
PF: >0,9
Lebensdauer: 50000h
Abstrahlwinkel: 15 * 60 °
Beleuchtungsabstand: >20m
IP-Rate: IP66
Gehäusematerial: Aluminium-Druckguss, Stalinit

RGB+CCT LED Wall Washer Light

2.4G Remote control, Smart phone APP control(Need Mi-Light WiFi iBox or WiFi Remote)
Support Amazon Alexa Voice Control(Need Mi-Light WiFi Remote)



16 million
colors change



CCT
Adjustable



Dimmable
Saturation control



IP66
waterproof rate



Auto-transmitting
Auto-synchronization

2.4GHz RF Remote Control

The lamp is controlled by 2.4GHz wireless remote; Control distance is within 30m



Compatible with:



B8



B0



B3 / T3



B4 / T4



FUT089



FUT092



FUT088



FUT095



FUT096

Support Amazon Alexa Voice Control Smart Phone APP Control

Turn ON/OFF and adjust brightness, color temperature, lighting colors
by Voice commands or APP; easily fulfill the personalized setting.


*Amazon Alexa Voice Control(Need Mi-Light WiFi Remote)

Smartphone APP Control(Need Mi-Light WiFi iBox or WiFi Remote)



Color temperature and brightness adjustable randomly

Color temperature and brightness adjustable making many kinds of lighting atmosphere

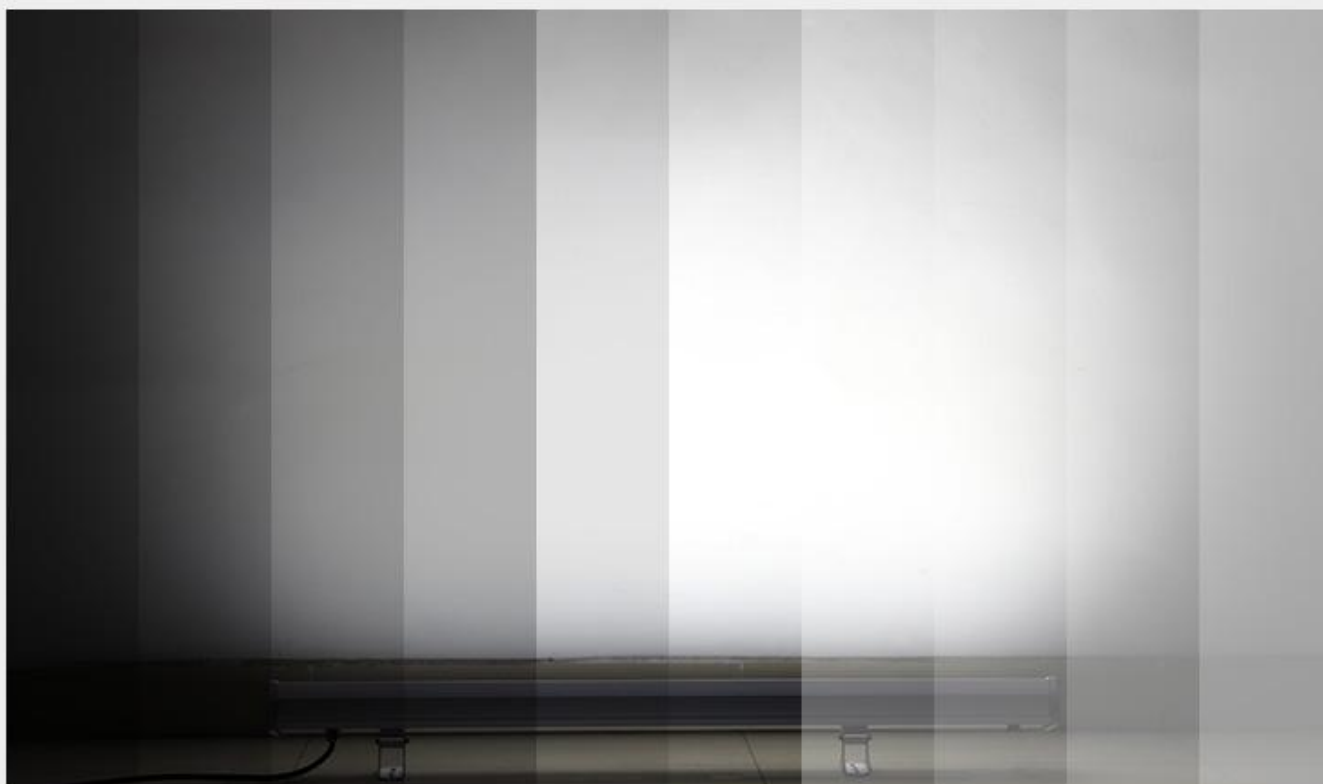

2700K

6500K

Transmitting mode instruction

One wall washer light can transmit the signals from the remote control to another wall washer light within 30m, as long as there is a wall washer light within 30m, the remote control distance can be limitless.



Auto-synchronization function

Different wall washer light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed, and within 30m distance.




IP66 waterproof rate

Excellent waterproofness make the usage more safe



180° rotatable bracket; Easy installation

180° rotatable bracket; Adjustable randomly; Easy adjust the beam angle

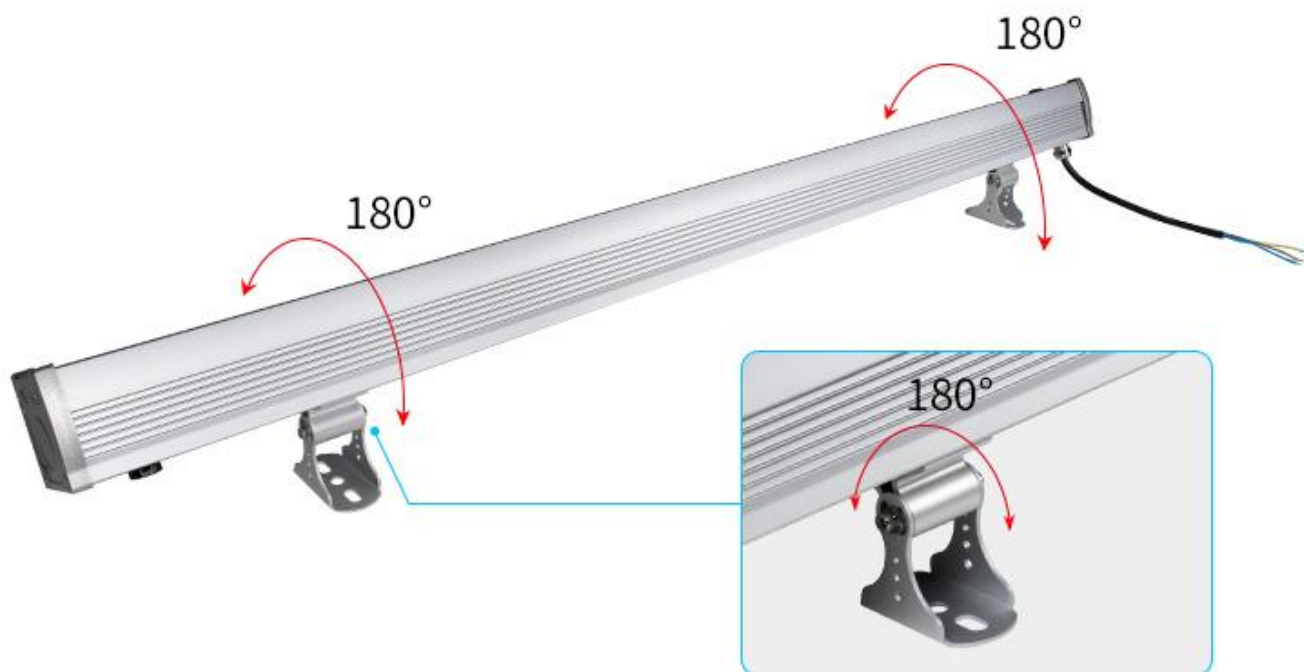

High lumen LED Chips

Low power consumption and luminance decrease;
Bright color and high brightness



Optical Lens

High lighting transmitting rate;
Wide beam angle and long illumination distance

Stalinite cover

Strong hardness; Cold-resistant and heat-resistant



Aluminum Alloy housing, fast heat dissipation

High quality Aluminum housing; Strong hardness, anti-corrosion and fast heat dissipation



Application

