

Link zum Produkt: <https://treppenbeleuchtung.info/dmx-512-d5-g100-rgb+cct-led-garden-light-p-2635.html>



DMX 512 D5-G100 RGB+CCT LED Garden Light



Preis	571.80 Euro
Verfügbarkeit	Vorhanden
Versanddauer	14 Tage
Katalognummer	2635
Erzeuger	Mi.Light

Produktbeschreibung

- **Product Name: 100W RGB+CCT LED Garden Light (DMX512 & RDM)**
- Model No.: D5-G100
- Power: 100W
- Input Voltage: AC100~240V 50/60Hz
- Working Temperature: -20-45°C
- Color Temperature: 2700K~6500K
- Luminous Flux: 7500LM
- Luminous Efficiency: 75LM/W
- CRI: >80
- PF: >0.9
- Lifespan: 50000 hours
- Beam Angle: 25°
- IP Rate: IP65
- Occupy 5 DMX Address
-

100W RGB+CCT LED Garden Light (DMX512&RDM)

RGB + color temperature adjustable | Support RDM function | IP65 waterproof rate

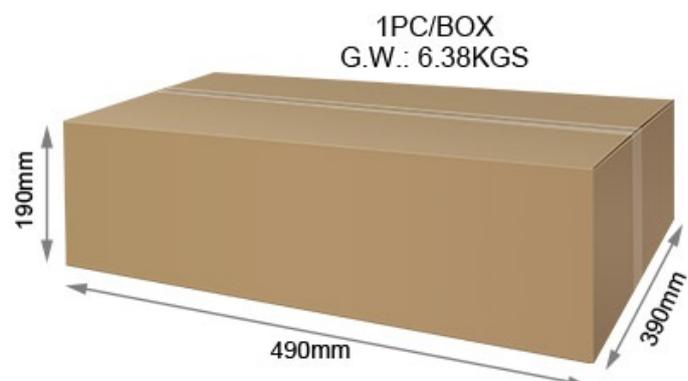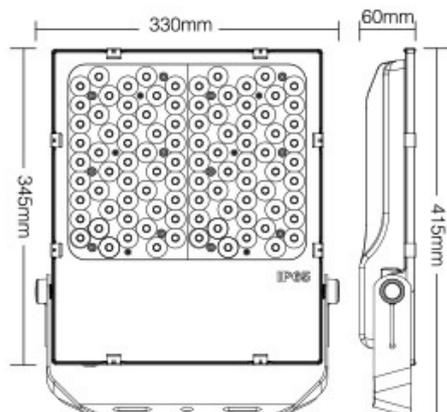

Accord with DMX512 standard protocol Support RDM function

Comply with DMX512, DMX512 (1990), DMX512-A, RDM V1.0
(E1.20-2006 ESTA standard) International standard agreement



Change RGB+CCT colors freely to make smart lighting atmosphere



Color temperature and brightness adjustable randomly

Brightness adjustable, Adjust the color temperature from 2700-6500K make the light you want




IP65 Waterproof

Professional waterproof technology
High performance waterproof



Simple and fast operation

Digital display, set DMX start address through touch button

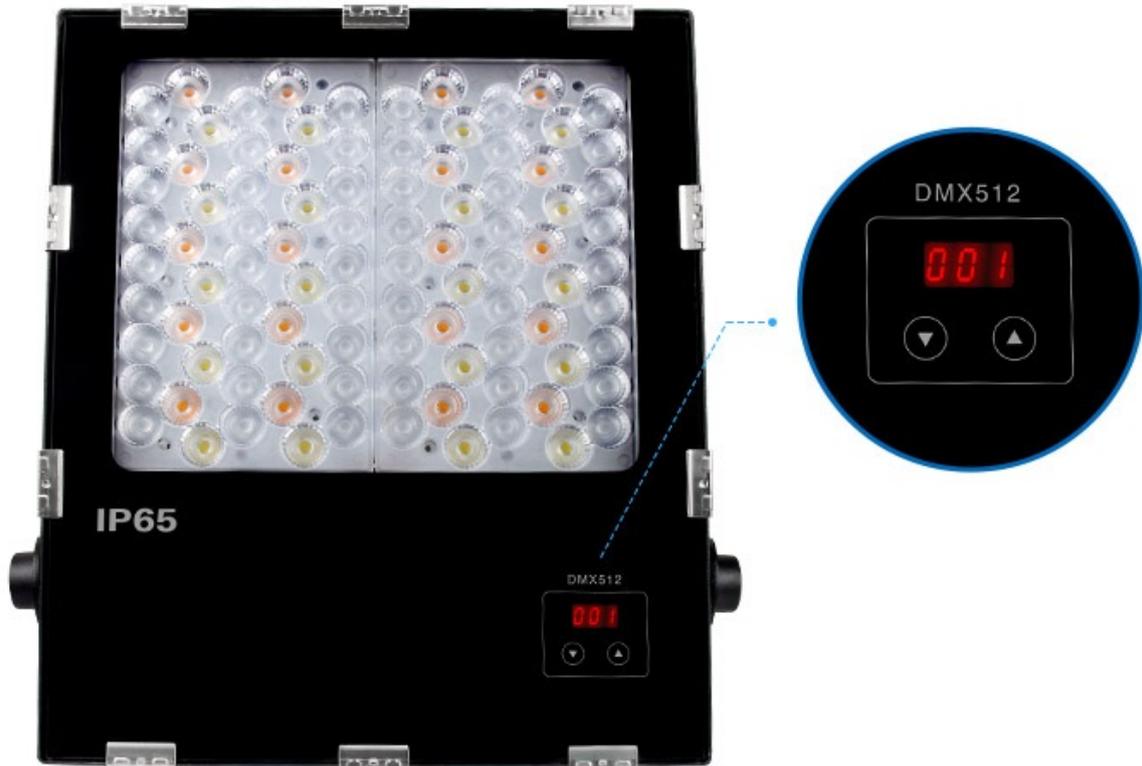

Optical Lens

Anti-dazzling optical lens; diverging light scientifically. Symmetrical and bright light ray

High lumen LED Chips

Low power consumption and luminance decrease; Bright color and high brightness





High efficiency heat dissipation

Integrative Aluminum design
Inserted thermal conduction
Protect light source lifespan

waterproof and ventilation valve


balance differential pressure
inside and outside, Avoid
condensation inside the



Power cable nut

Copper nickel plating material
Waterproof and dustproof, Never Rusting

Connection Diagram

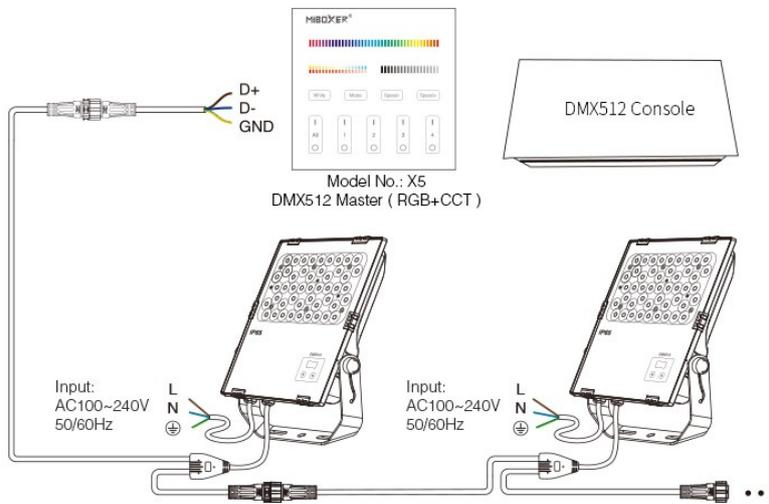

Attention: If more than 32 pcs DMX garden lights are connected or using the super long signal cable, you need DMX signal amplifier. Amplify signal cannot be over 5 times.

Application Scenes



